



	· · · · · ·	· · · · · · ·	
	R		

THE NEW WORKPLACE

> As governments around the world look to ease lockdowns, companies are searching for safe ways to get their employees back to work as soon as possible. Safety as well as mental and physical well-being are now firmly at the top of the corporate agenda. Employees will demand a safe workplace – they felt secure and protected in their homes, they will want to feel equally safe when they return to the workplace.

Cultural Change

Companies have a responsibility to create a work environment that minimises the potential for virus transmission. They also have a responsibility to develop a new culture and promote responsible behaviours such as social distancing and enhanced hygiene practices.

.

Milliken



· · · · · · · · · ·			
· · · · · · · · ·			

ТНЕ N E W **WORKPLACE**


Visible Safety Guidelines

Employees will be required to play their part and act responsibly. This means companies will need to move rapidly to provide clear guidelines. These new rules must be fast and cost effective to implement, highly visible and easy to follow.

The Design Challenge

The workplace needs re-thinking and this creates profound new design challenges. The floor plane can play an important role in offering effective solutions. Floor covering can provide the perfect medium for informative communications that can direct traffic flow and indicate the positioning of individuals and furniture pieces. Signage embedded into the floor is impossible to overlook and simple to follow.

Milliken

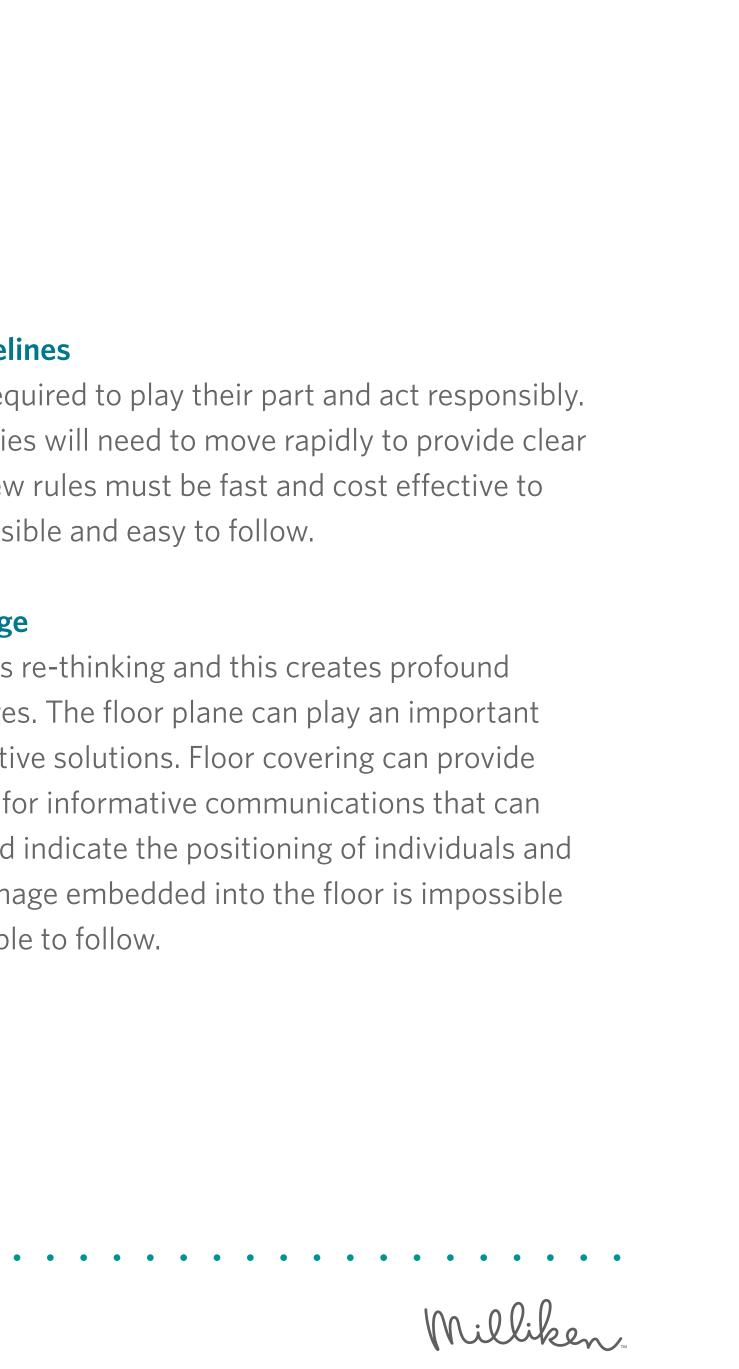

SOCIAL FACTOR COLLECTION

> To support the culture of the new workplace, Milliken has created 'Social Factor', a collection of informational carpet tile graphics that can easily be embedded into any carpet tile layout as well as Protective Flooring solutions in complementing designs.


Floor Covering As a Tool for Safety Messaging

Social Factor offers a cohesive collection of floor signs that promote social distancing and attention to hygiene. Social Factor is a well researched and highly considered carpet and protective flooring collection designed to meet the safety communication needs of the new workplace.

Quick and Easy to Customise

Social Factor is quick and easy to customise to meet a client's specific information requirements.

Milliken

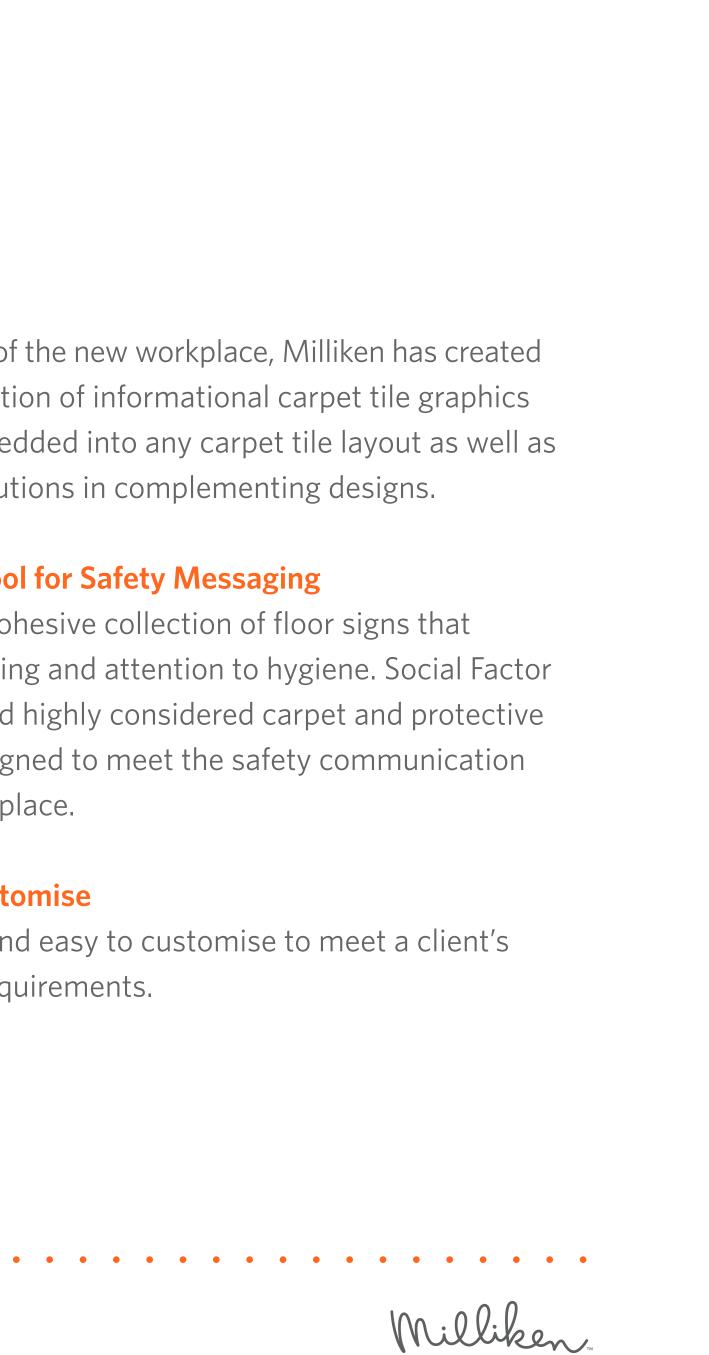

COLL LE E C	COLLE E C T I O N


S O C I A L FACTOR COLLECTION

> Social Factor brings safety messages to life with lively and imaginative design treatments created to promote a spirit of positivity and commitment to a safe and healthy workplace.

Key messages include:

- Stay 2m Apart / Don't Get Too Close To Others
- Walk in this Direction
- Enter and Leave a Meeting Room / Bathroom / Dining Room This Way
- Use this Entrance / Exit
- Wash your Hands

• • •

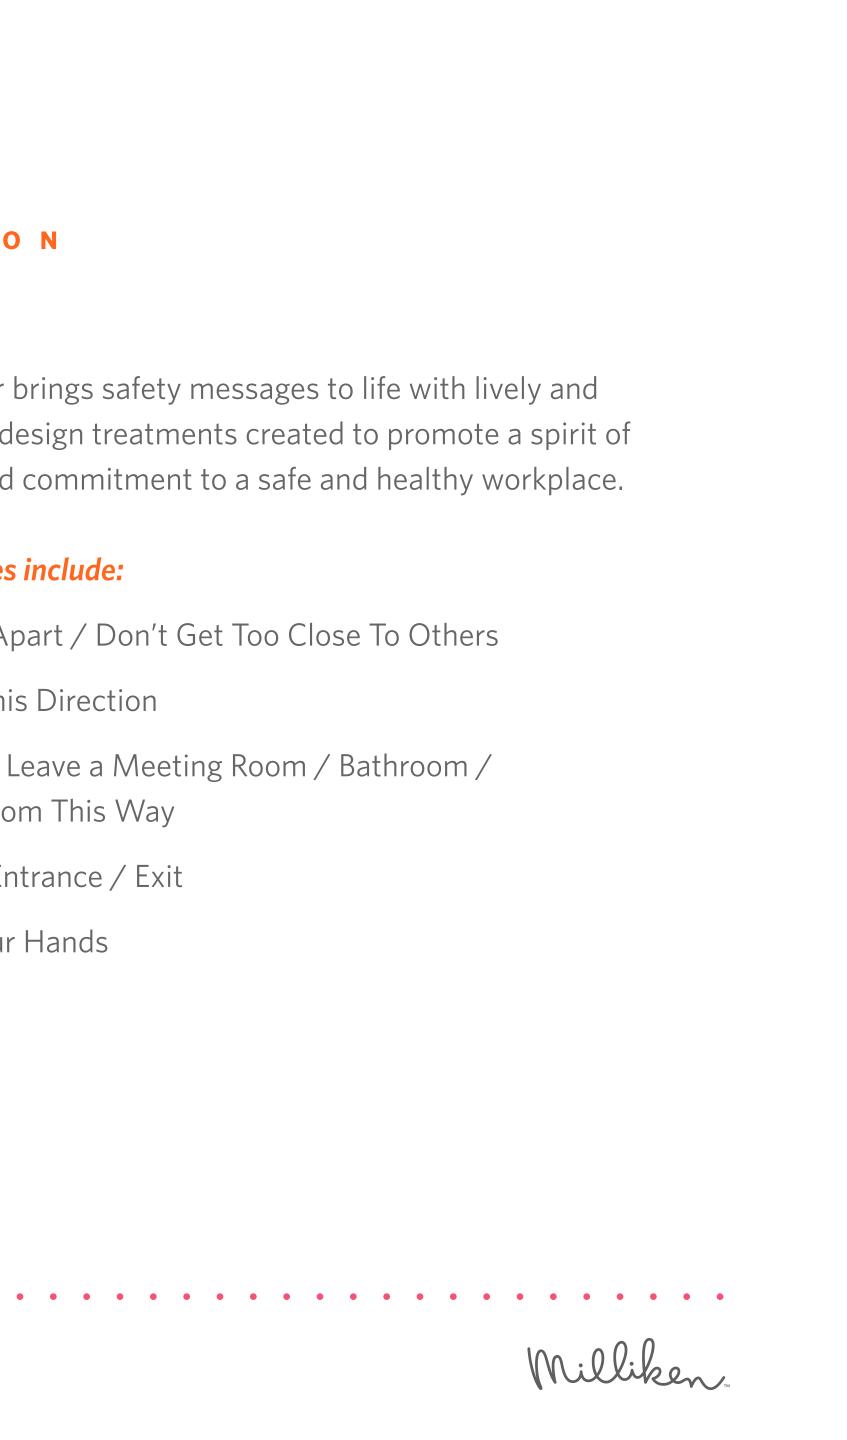


SOCIAL FACTOR


Social Factor is presented in 5 design concepts:



Chase The Rainbow

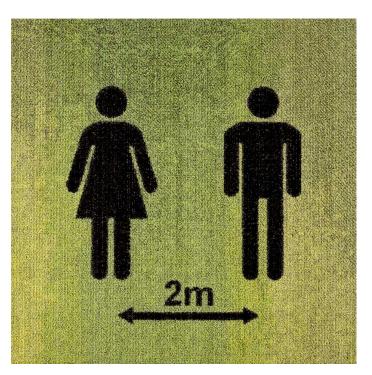


Drawn Together

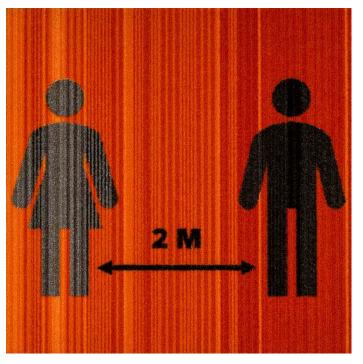

Fixated With Stripes




Set In Concrete

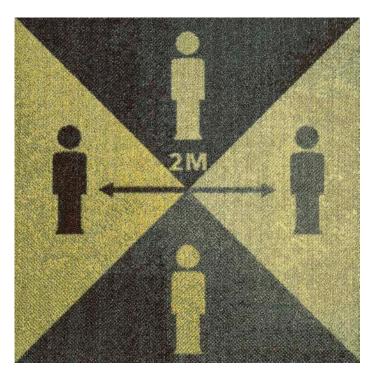

Clerkenwell Life



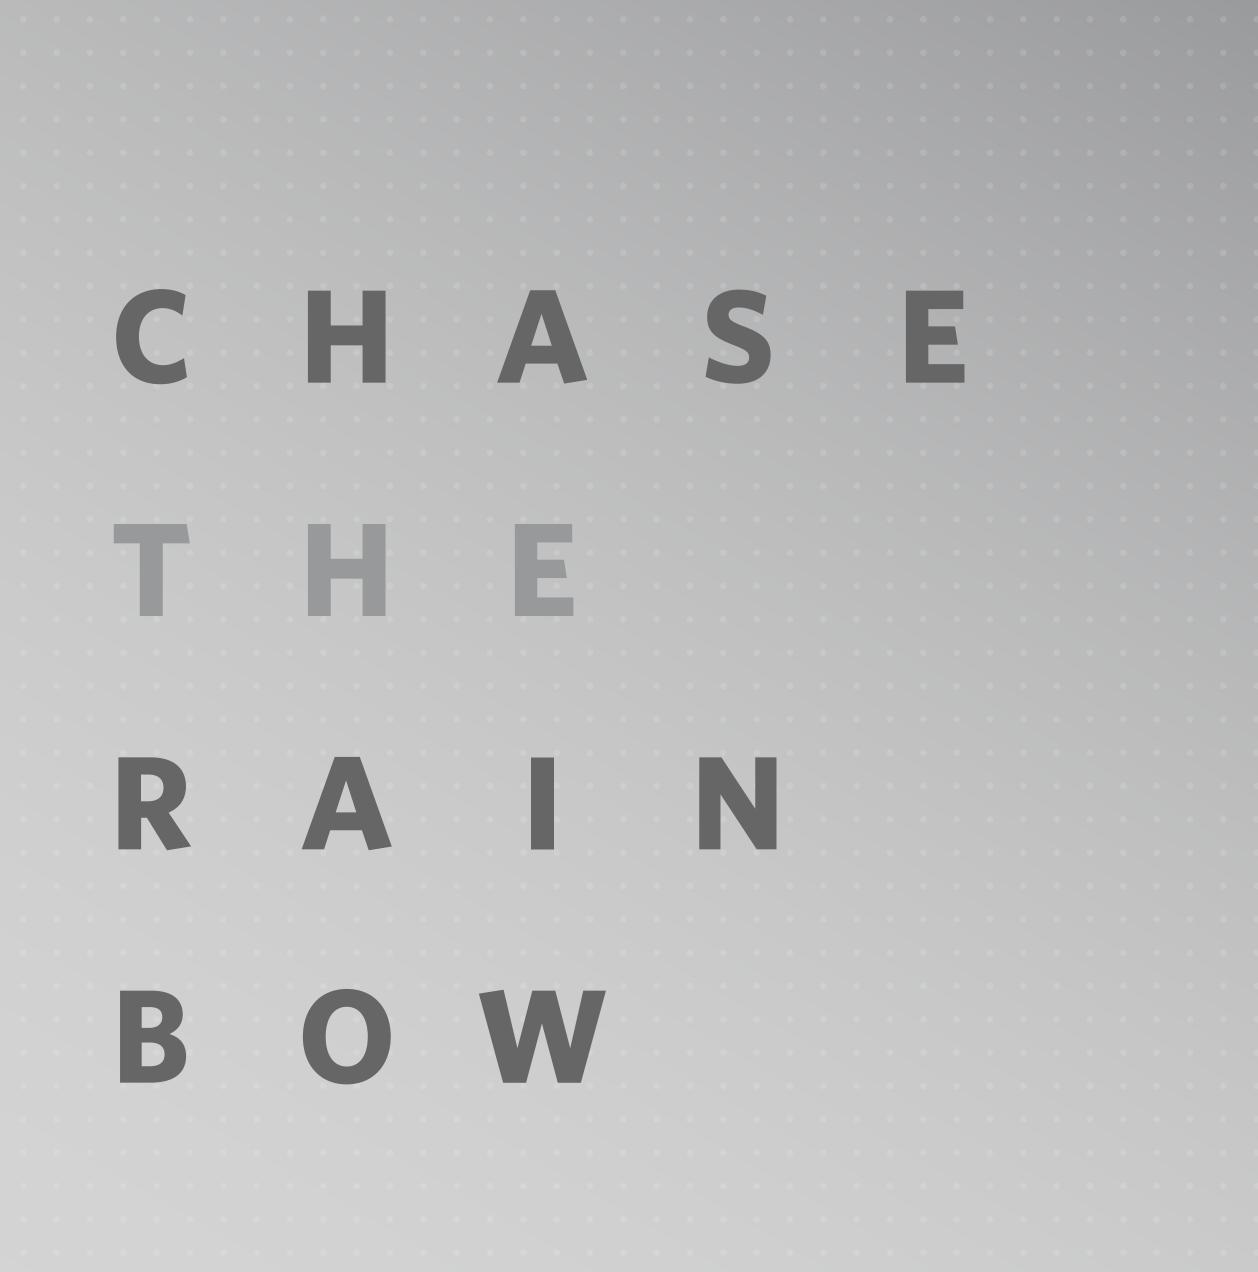

Chase The Rainbow

Rainbows have become a common sight across Europe during the Coronavirus pandemic, as people put up pictures of the beautiful weather phenomenon in their windows to ease an otherwise sombre mood.

To celebrate the spirit of community and recognise the breath-taking work undertaken by the UK's amazing National Health Service, the Milliken design team used the brilliance of Millitron[®] patterning technology to create an art installation featuring a series of rainbow themed carpet tiles.

Chase the Rainbow uses the work from that art installation as the foundation for the first family of designs in the Social Factor Collection.




These tiles were created for an original art installation. They are not part of Milliken's standard product offer.

• • • •


Milliken.

SOCIAL FACTOR / Chase The Rainbow

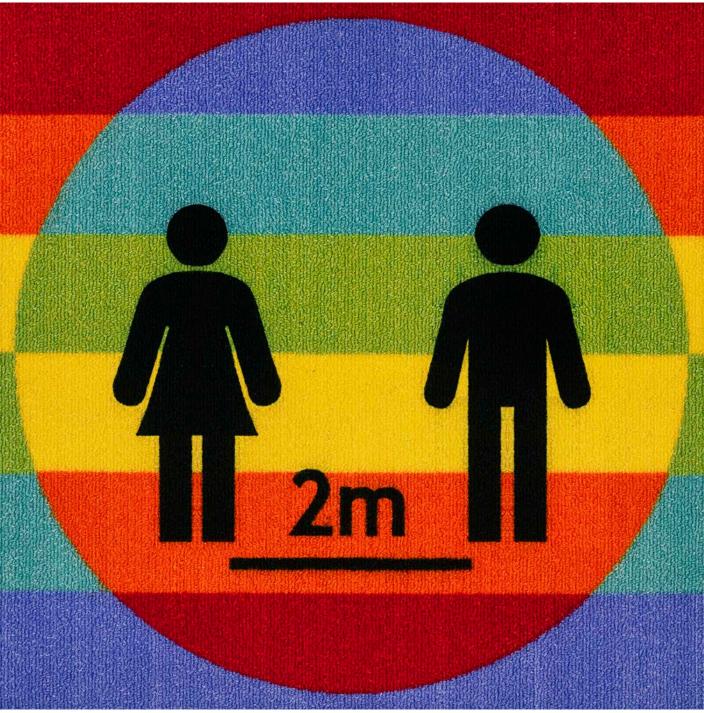



RCD-01 Rainbow Circle Distance

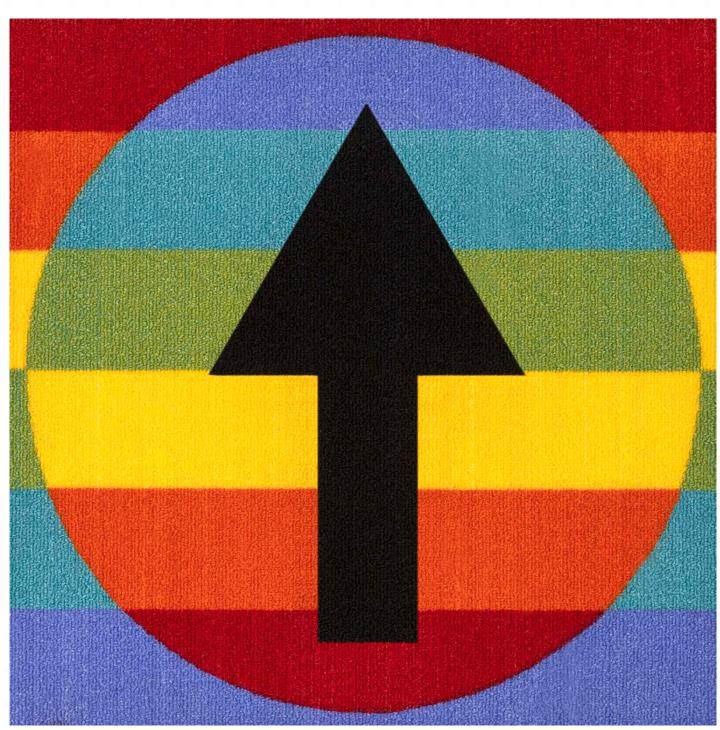

RCA-01 Rainbow Circle Arrow



RCH-01 Rainbow Circle Hand Wash



SOCIAL FACTOR / Chase The Rainbow



RSD-02 Rainbow Square Distance

RSA-02 Rainbow Square Arrow





RSH-02 Rainbow Square Hand Wash





Set In Concrete


Inspired by the popularity of concrete as an interior finish, the Comfortable Concrete collection combines the raw urban appeal of the concrete aesthetic with the underfoot comfort of a plush cushion back carpet tile.

Social Factor, Set In Concrete reinterprets Comfortable Concrete into a family of informational carpet designs that combine bold neon graphics with spray-paint graffiti styling overlaid onto a rugged concrete effect background.

.

Milliken

•

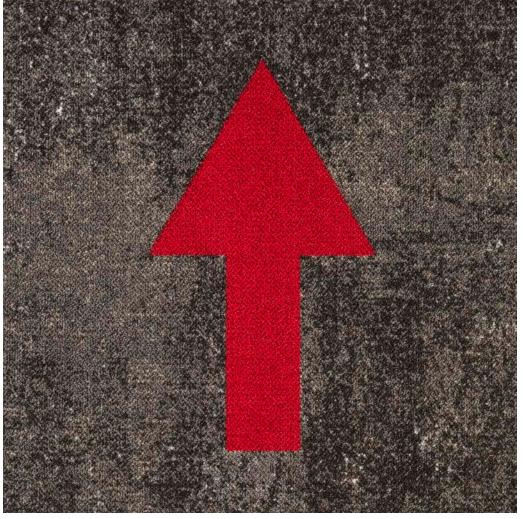

SCA133-169-05 Concrete Arrow Red




SCD133-169-05 Concrete Distance Red



SCA133-111-05 Concrete Arrow Yellow




SCD133-111-05 Concrete Distance Yellow

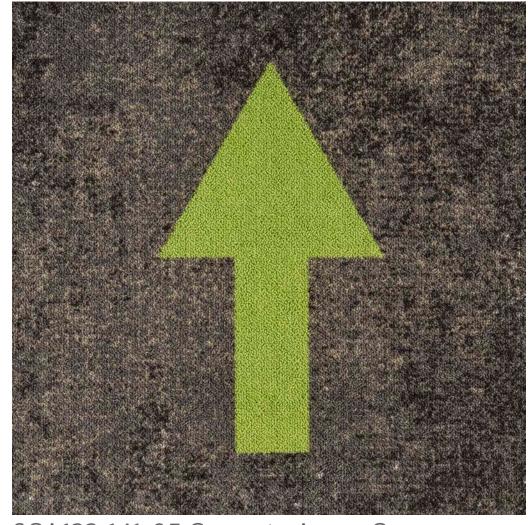


SCA133-141-05 Concrete Arrow Green



SCD133-141-05 Concrete Distance Green

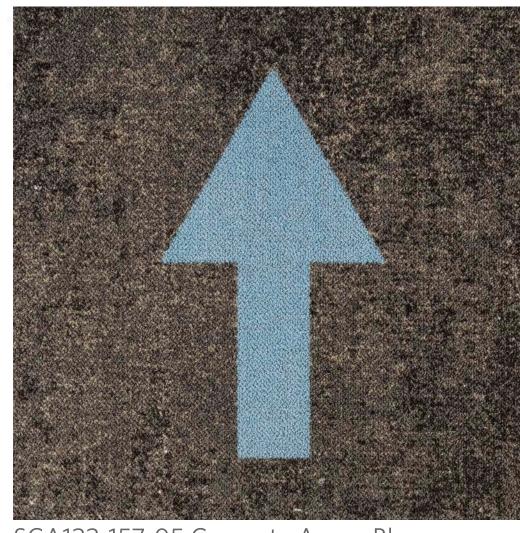

SCA133-157-05 Concrete Arrow Blue

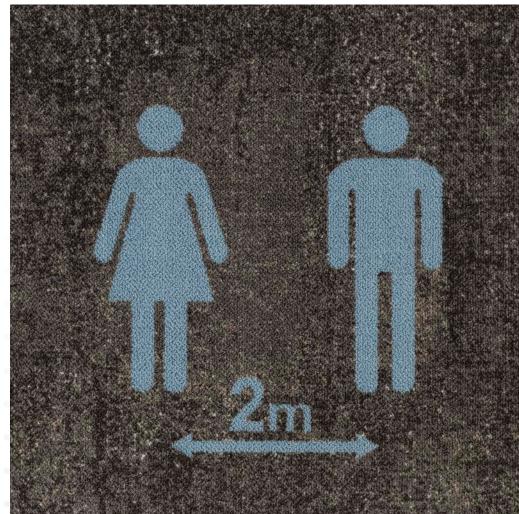

SCD133-157-05 Concrete Distance Blue

Available with Comfort Plus® or Comfort Lite backing. For full specifications please see the end of this document






SCH133-169-05 Concrete Hand Wash Red



SCC133-169-05 Concrete Chair Red



SCH133-111-05 Concrete Hand Wash Yellow

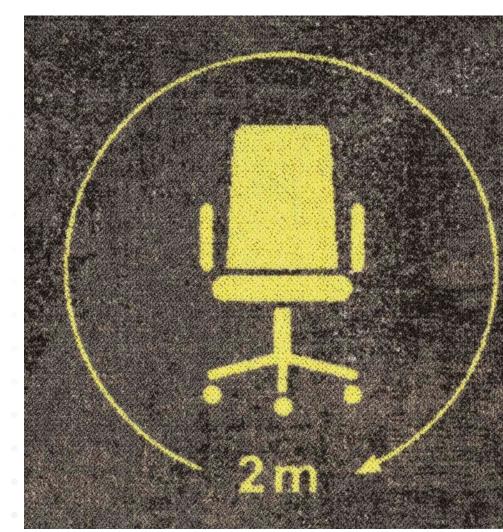

SCC133-111-05 Concrete Chair Yellow




SCH133-141-05 Concrete Hand Wash Green



SCC133-141-05 Concrete Chair Green




SCH133-157-05 Concrete Hand Wash Blue

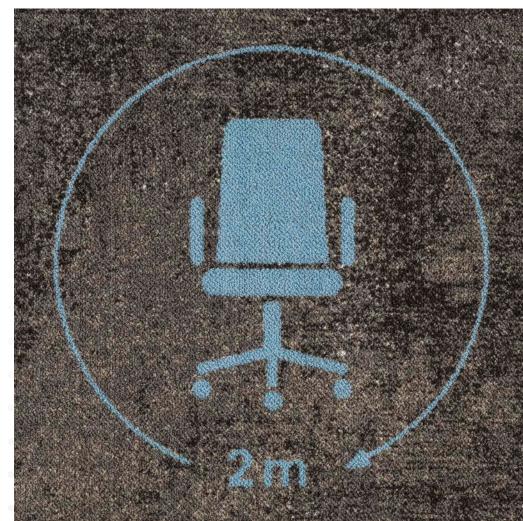


SCC133-157-05 Concrete Chair Blue

Available with Comfort Plus® or Comfort Lite backing. For full specifications please see the end of this document




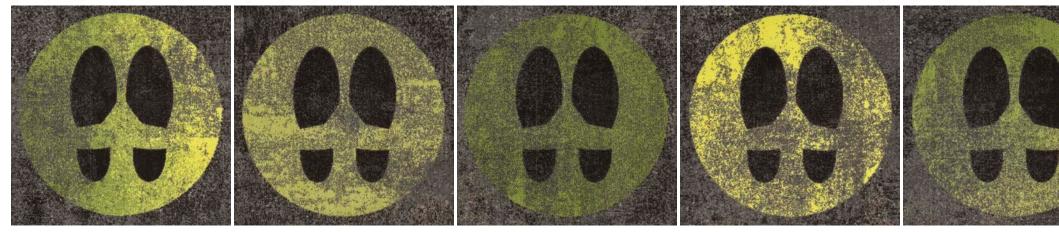


SCF133-141-05 Concrete Footsteps Green

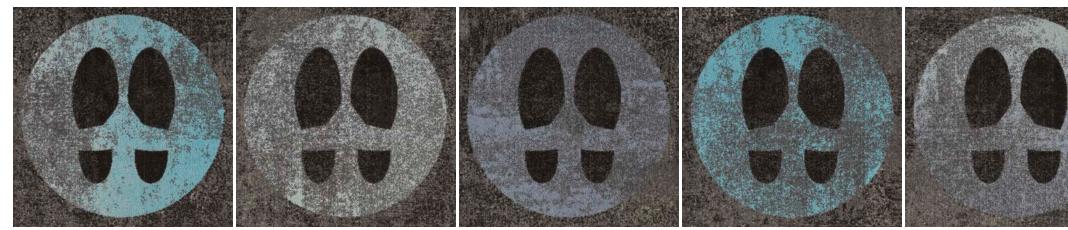

SCF133-172-05 Concrete Footsteps Blue

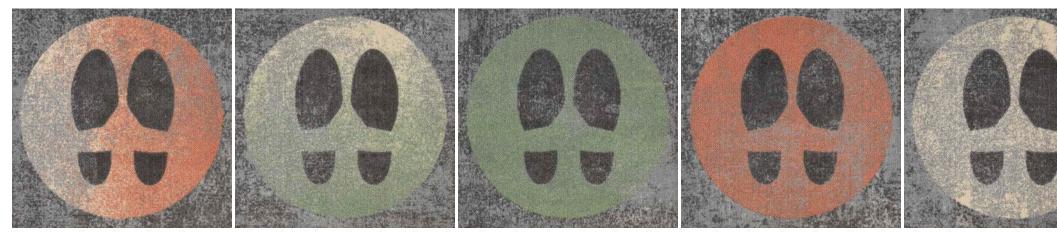


SCF05-221-180 Concrete Footsteps Warm

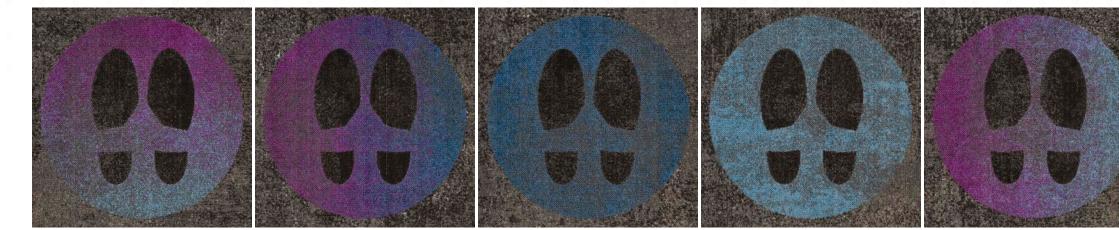

SCF133-151-05 Concrete Footsteps Purple



SCF133-190-05 Concrete Footsteps Orange

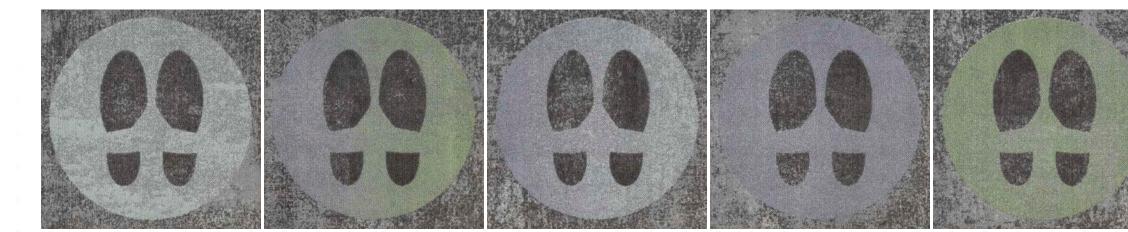

SCF05-245-180 Concrete Footsteps Cool Blue

Available with Comfort Plus® or Comfort Lite backing. For full specifications please see the end of this document










Drawn Together

From the outside to the inside, the Naturally Drawn collection reinterprets nature through artistic expression.


Social Factor, Drawn Together is a family of informational carpet signs lovingly crafted through the artist's hand whilst remaining true to the beauty of the original inspiration.

.


Milliken.

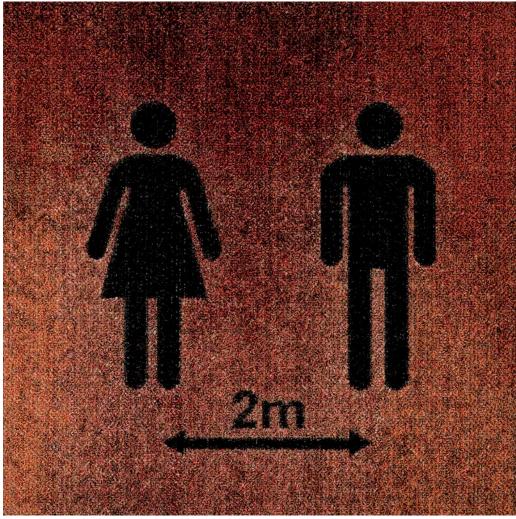

DRD102-70 Drawn Distance Pumpkin

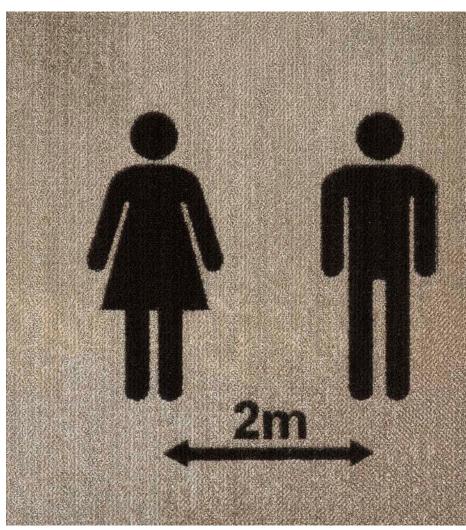


DRD144-83 Drawn Distance Canvas

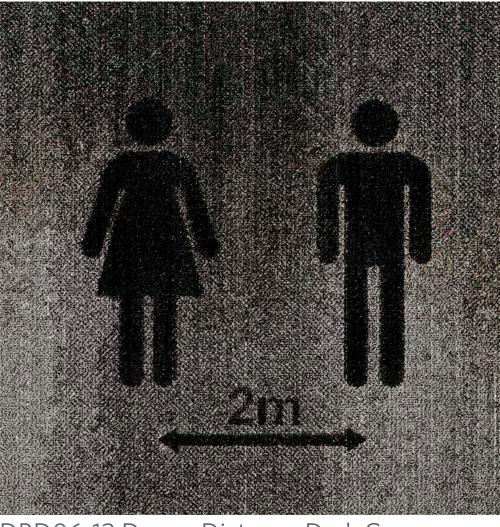


DRD06-13 Drawn Distance Dark Grey




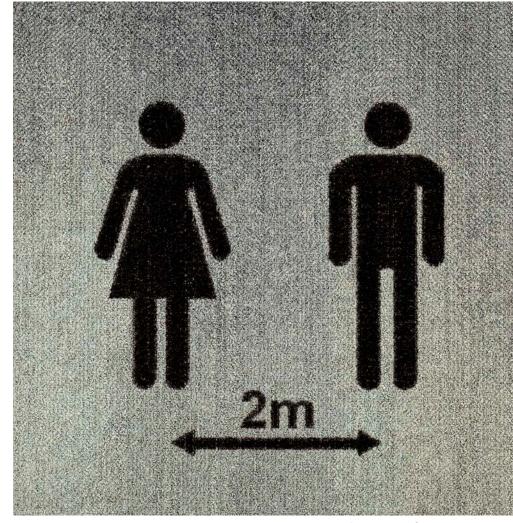

DRD158-139 Drawn Distance Crystal

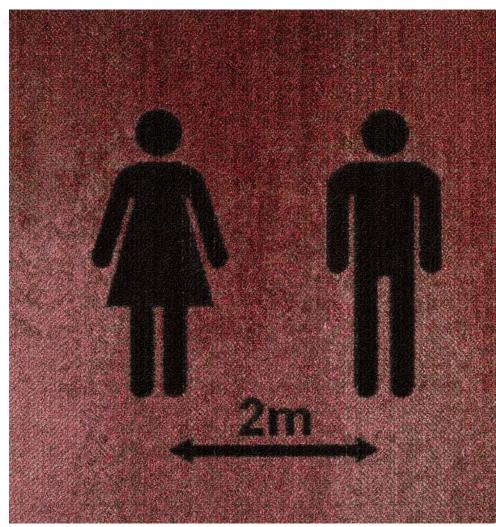


DRD110-104 Drawn Distance Pomegranate

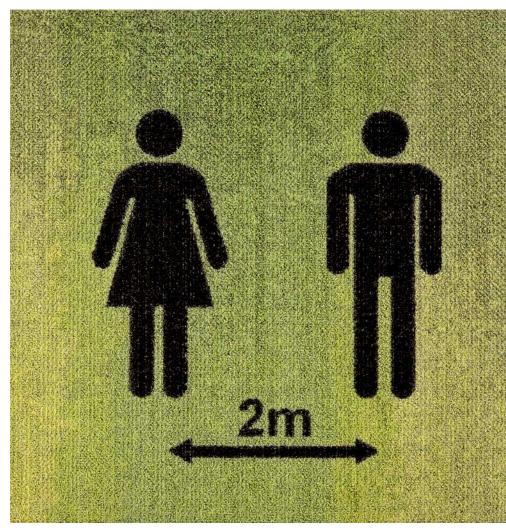


DRD103-141 Drawn Distance Hill Walk



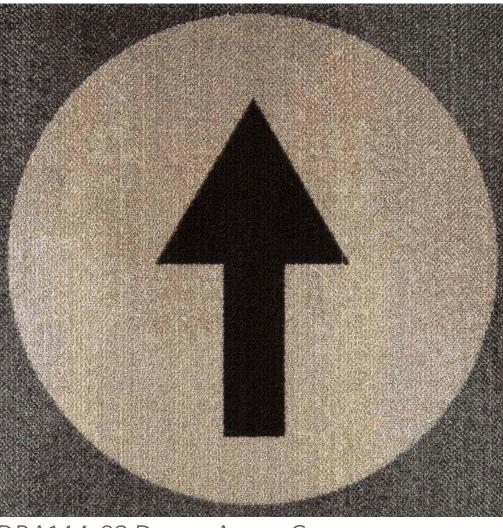


DRA144-83 Drawn Arrow Canvas

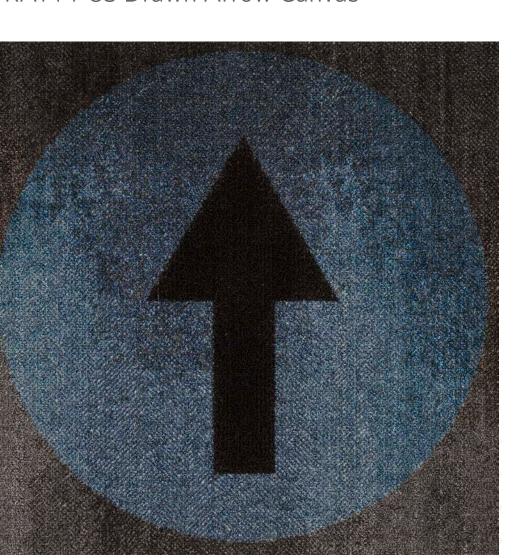


DRA123-157 Drawn Arrow Indigo




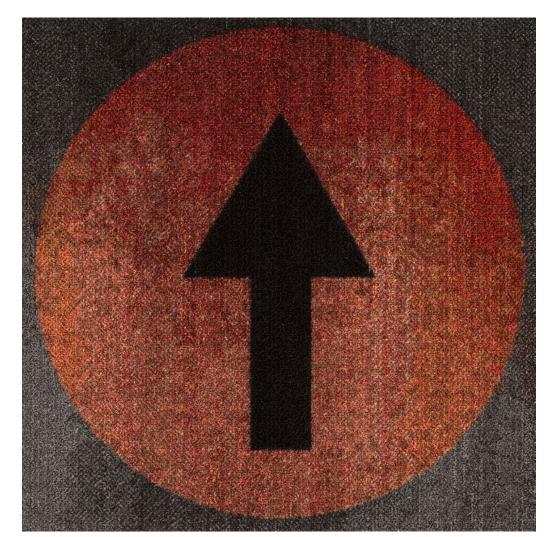

DRA102-70 Drawn Arrow Pumpkin

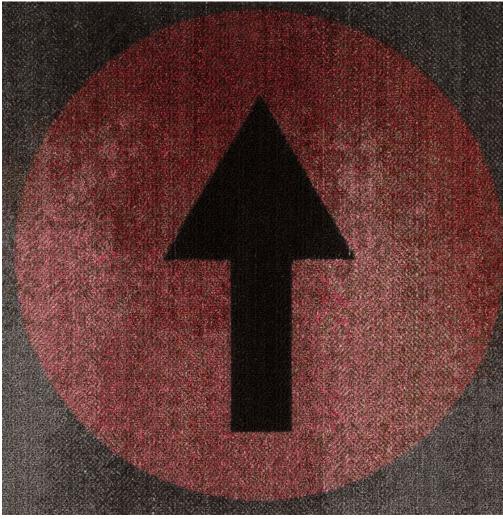

DRA110-104 Drawn Arrow Pomegranate

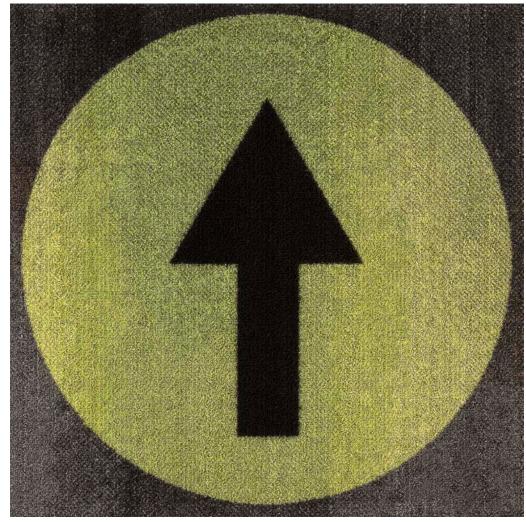


DRA103-141 Drawn Arrow Hill Walk

	•		
	•	CARPET	
	•	PE	
	•		
	•		
	•		
	•		



DNS144-83 Drawn Sneeze Canvas

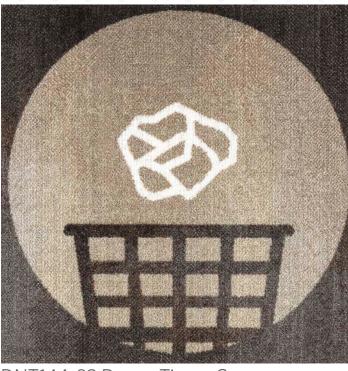




DNS103-141 Drawn Sneeze Hill Walk




DNS102-70 Drawn Sneeze Pumpkin

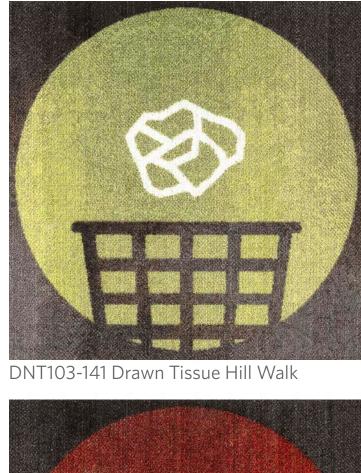




DNT144-83 Drawn Tissue Canvas


DNT102-70 Drawn Tissue Pumpkin

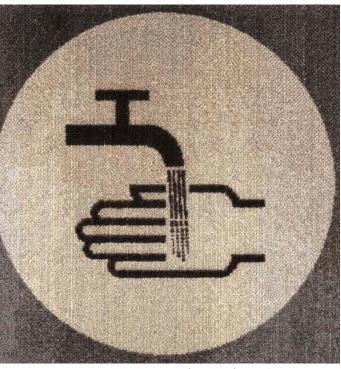

DNH144-83 Drawn Hand Wash 2 Canvas

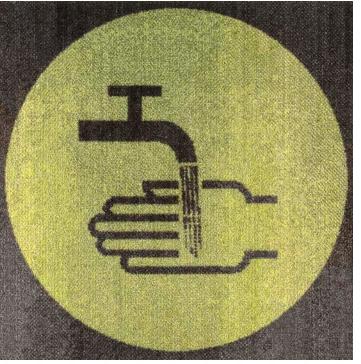


DNH103-141 Drawn Hand Wash 2 Hill Walk

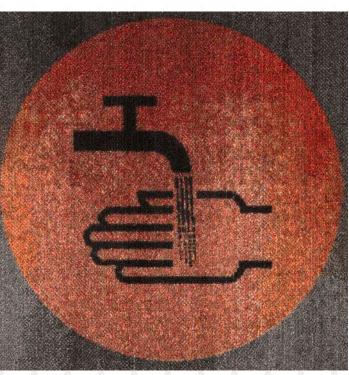

DNH102-70 Drawn Hand Wash 2 Pumpkin


 For full specifications please see the end of this document

	•		
	•	CARPE	
	•		
	•	-	
	•		
	•		
	•		
	•		

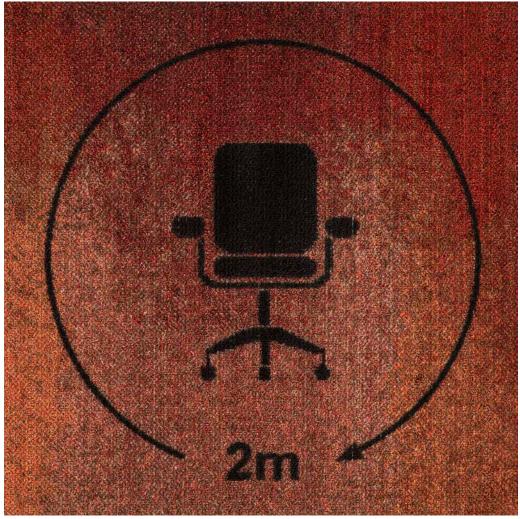



DRC102-70 Drawn Chair Pumpkin


. . . .

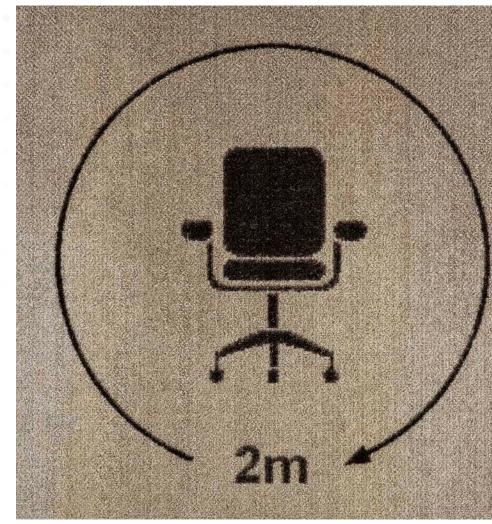


DRC144-83 Drawn Chair Canvas

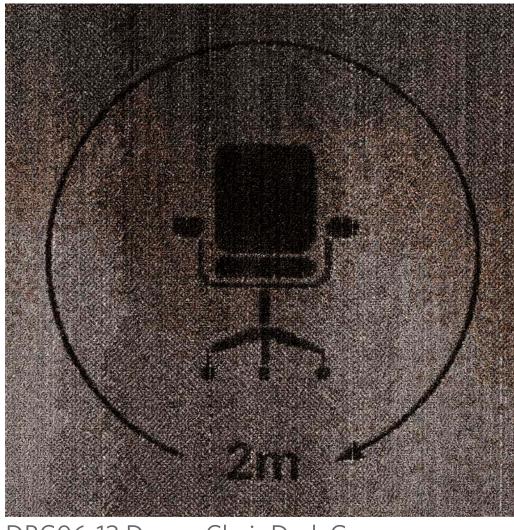

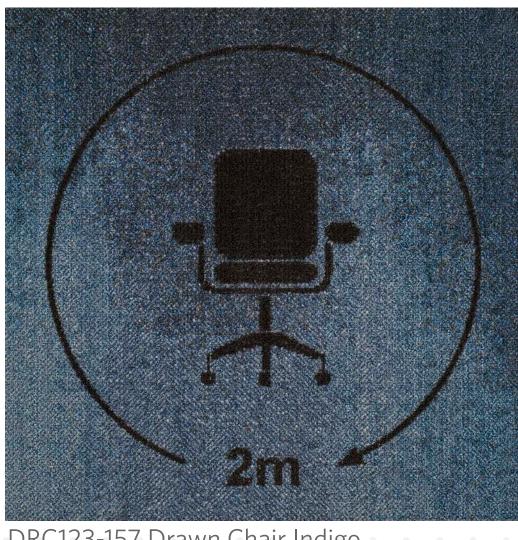


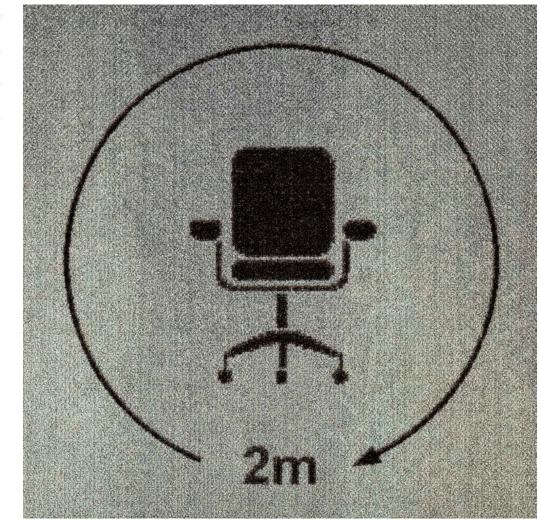

DRC58-139 Drawn Chair Crystal

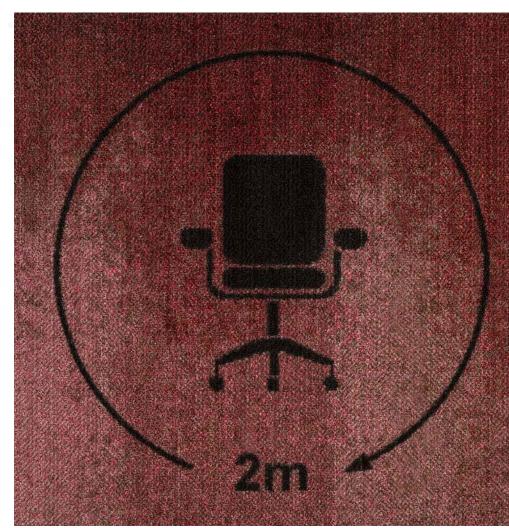


DRC110-104 Drawn Chair Pomegranate

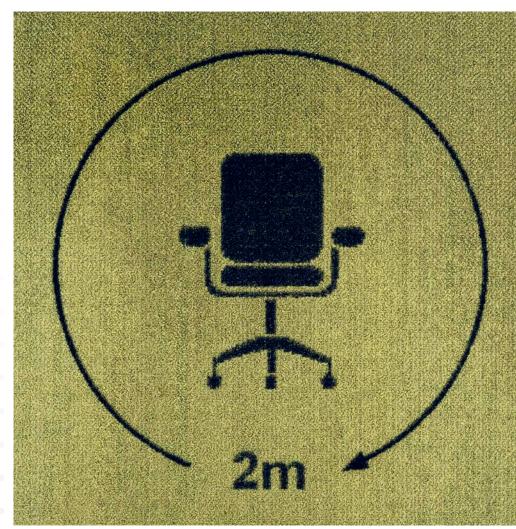


DRC06-13 Drawn Chair Dark Grey DRC123-157 Drawn Chair Indigo DRC103-141 Drawn Chair Hill Walk




• • •

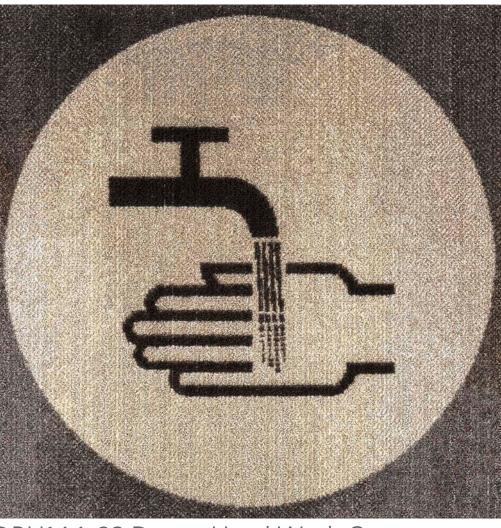


DRH144-83 Drawn Hand Wash Canvas

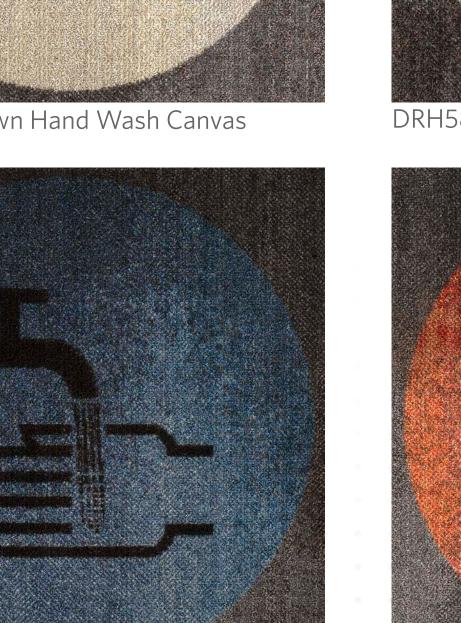


DRH123-157 Drawn Hand Wash Indigo

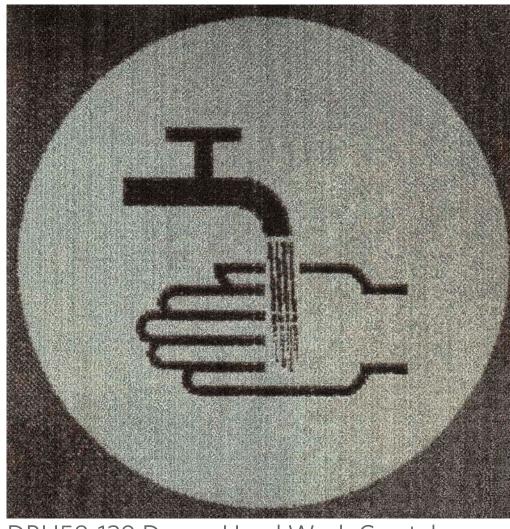

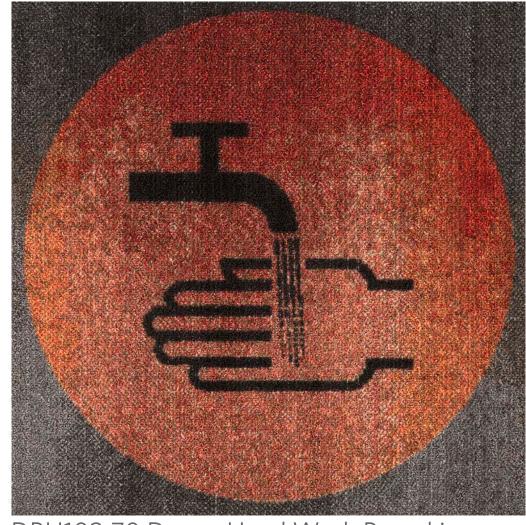


DRH102-70 Drawn Hand Wash Pumpkin

DRH58-139 Drawn Hand Wash Crystal

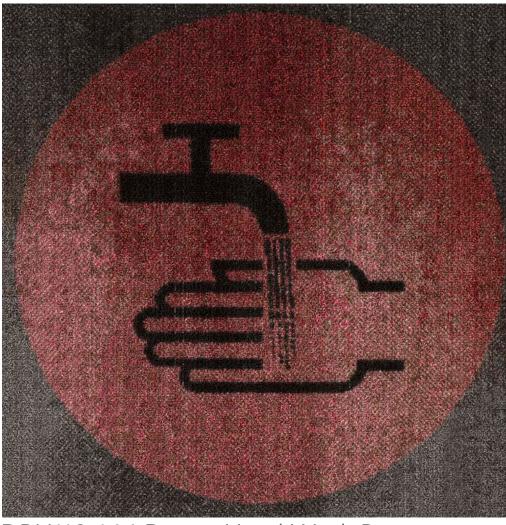


DRH110-144 Drawn Hand Wash Pomegranate

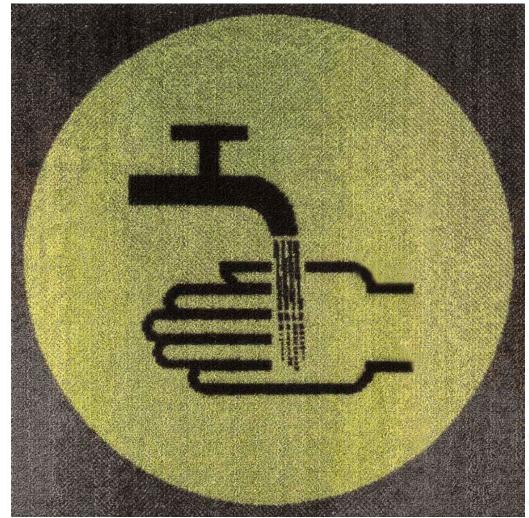

H103-141 Drawn Hand Wash Hill Walk

	•		
	•	CARPET	
	•	PE	
	•		
	•		
	•		
	•		

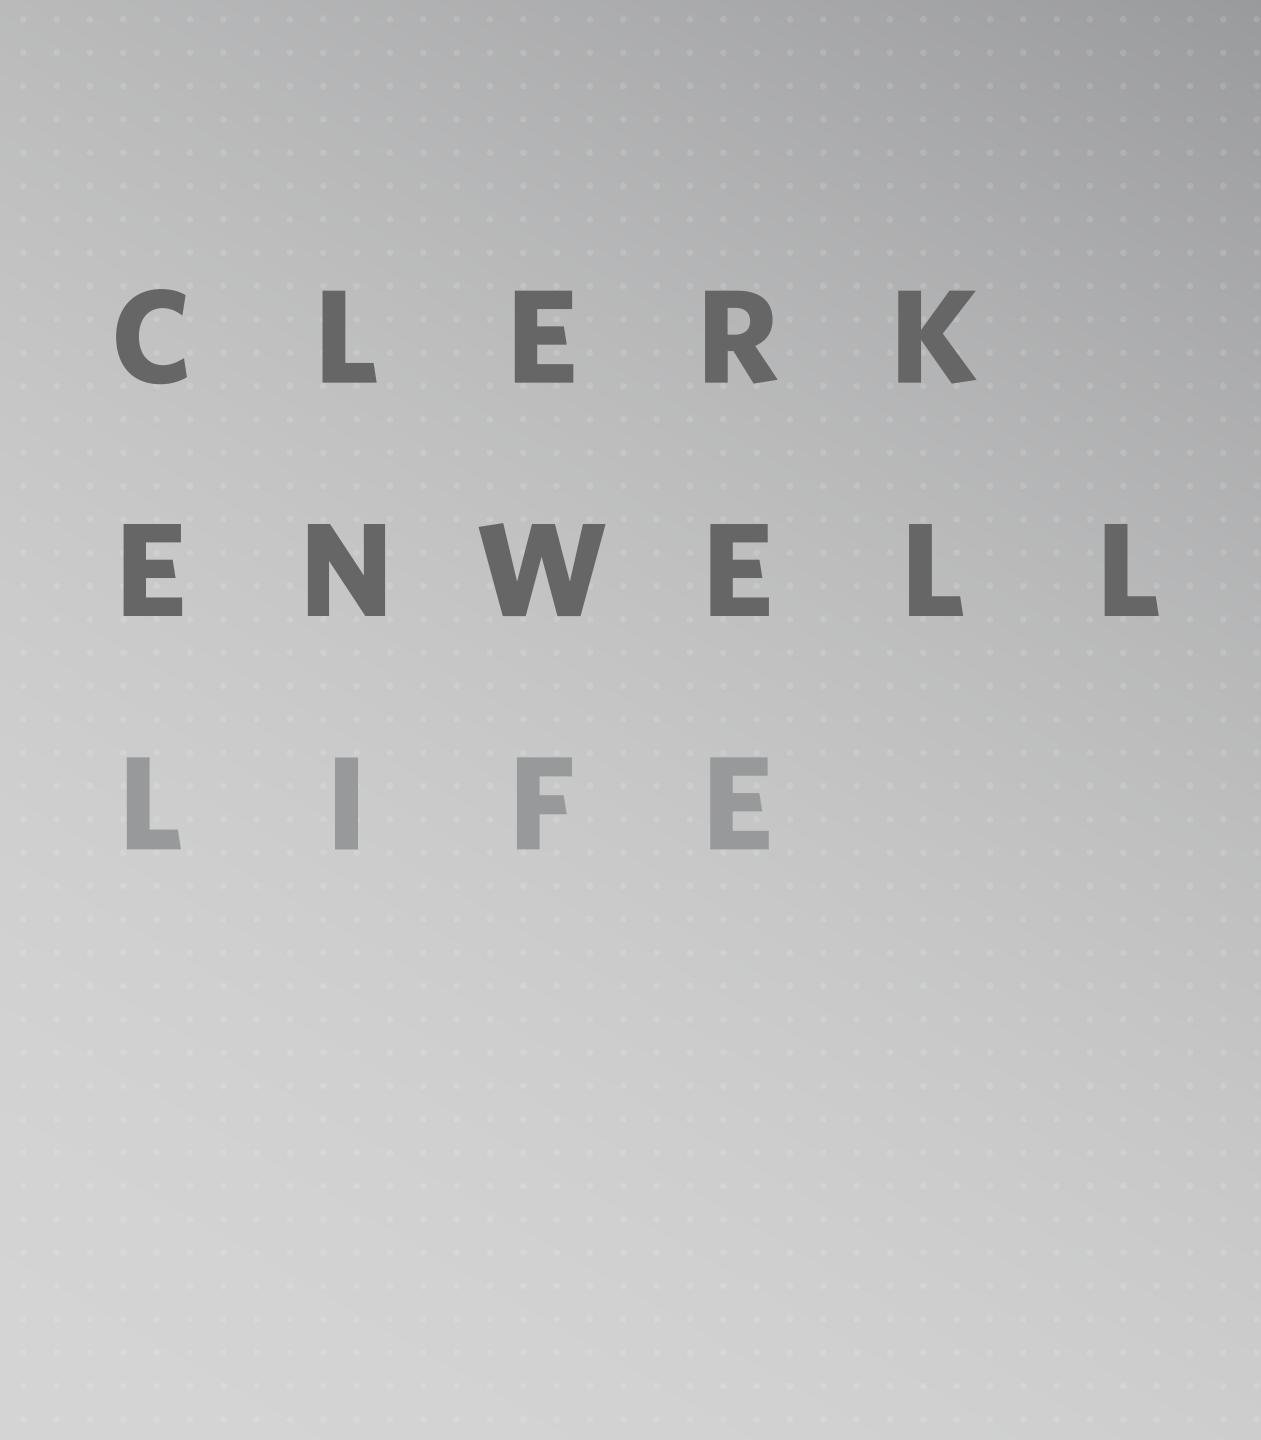

Clerkenwell Life

Home to our London showroom and source of much of our design inspiration, the Clerkenwell collection celebrates the cultural diversity of this trend-setting design hub.


Social Factor, Clerkenwell Life pays homage to our East London community of friends and neighbours through this energetic range of informational carpet signs.

.

Milliken

.

SOCIAL FACTOR / Clerkenwell Life

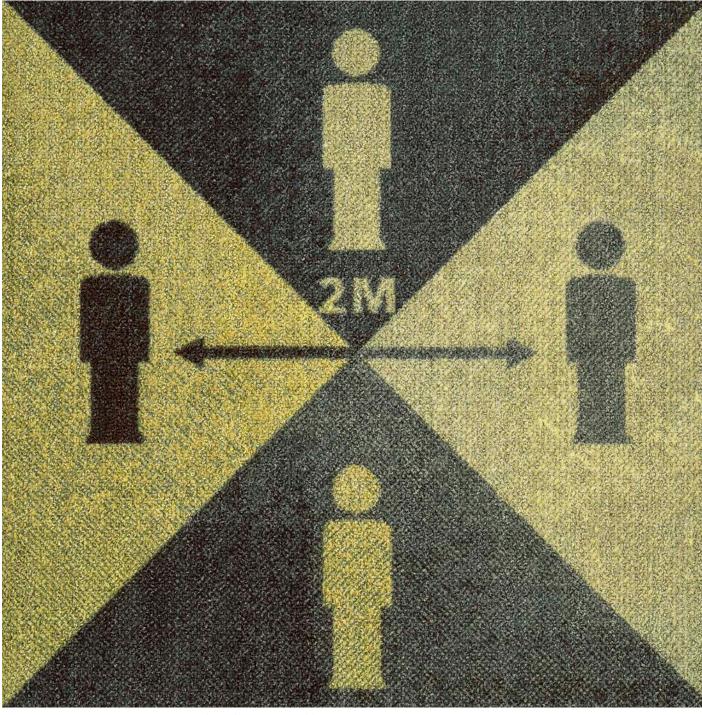

CKD103-79-108 Clerkenwell Distance Green



CKC103-79-108 Clerkenwell Crowd Green




SOCIAL FACTOR / Clerkenwell Life




CKD132-118-139 Clerkenwell Distance Aqua




CKC132-118-139 Clerkenwell Crowd Aqua

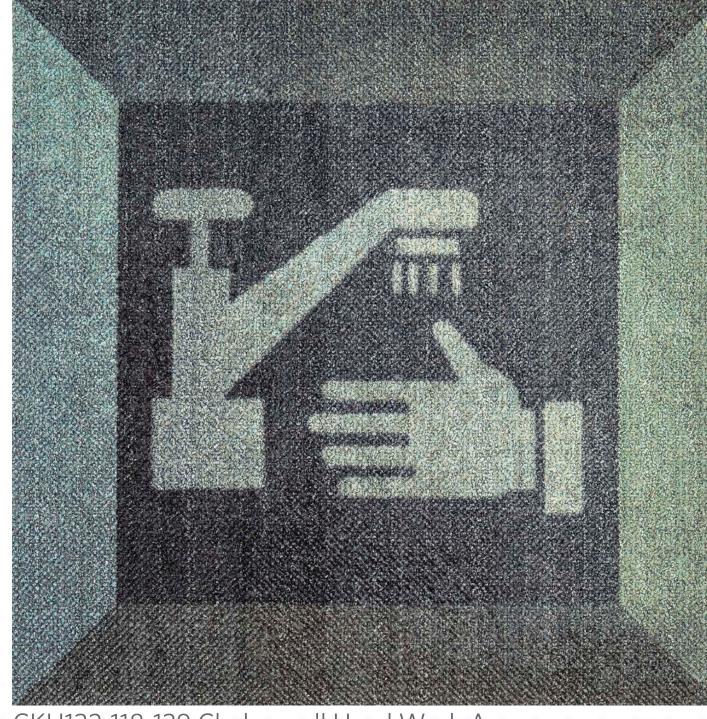

CKH132-118-139 Clerkenwell Hand Wash Aqua

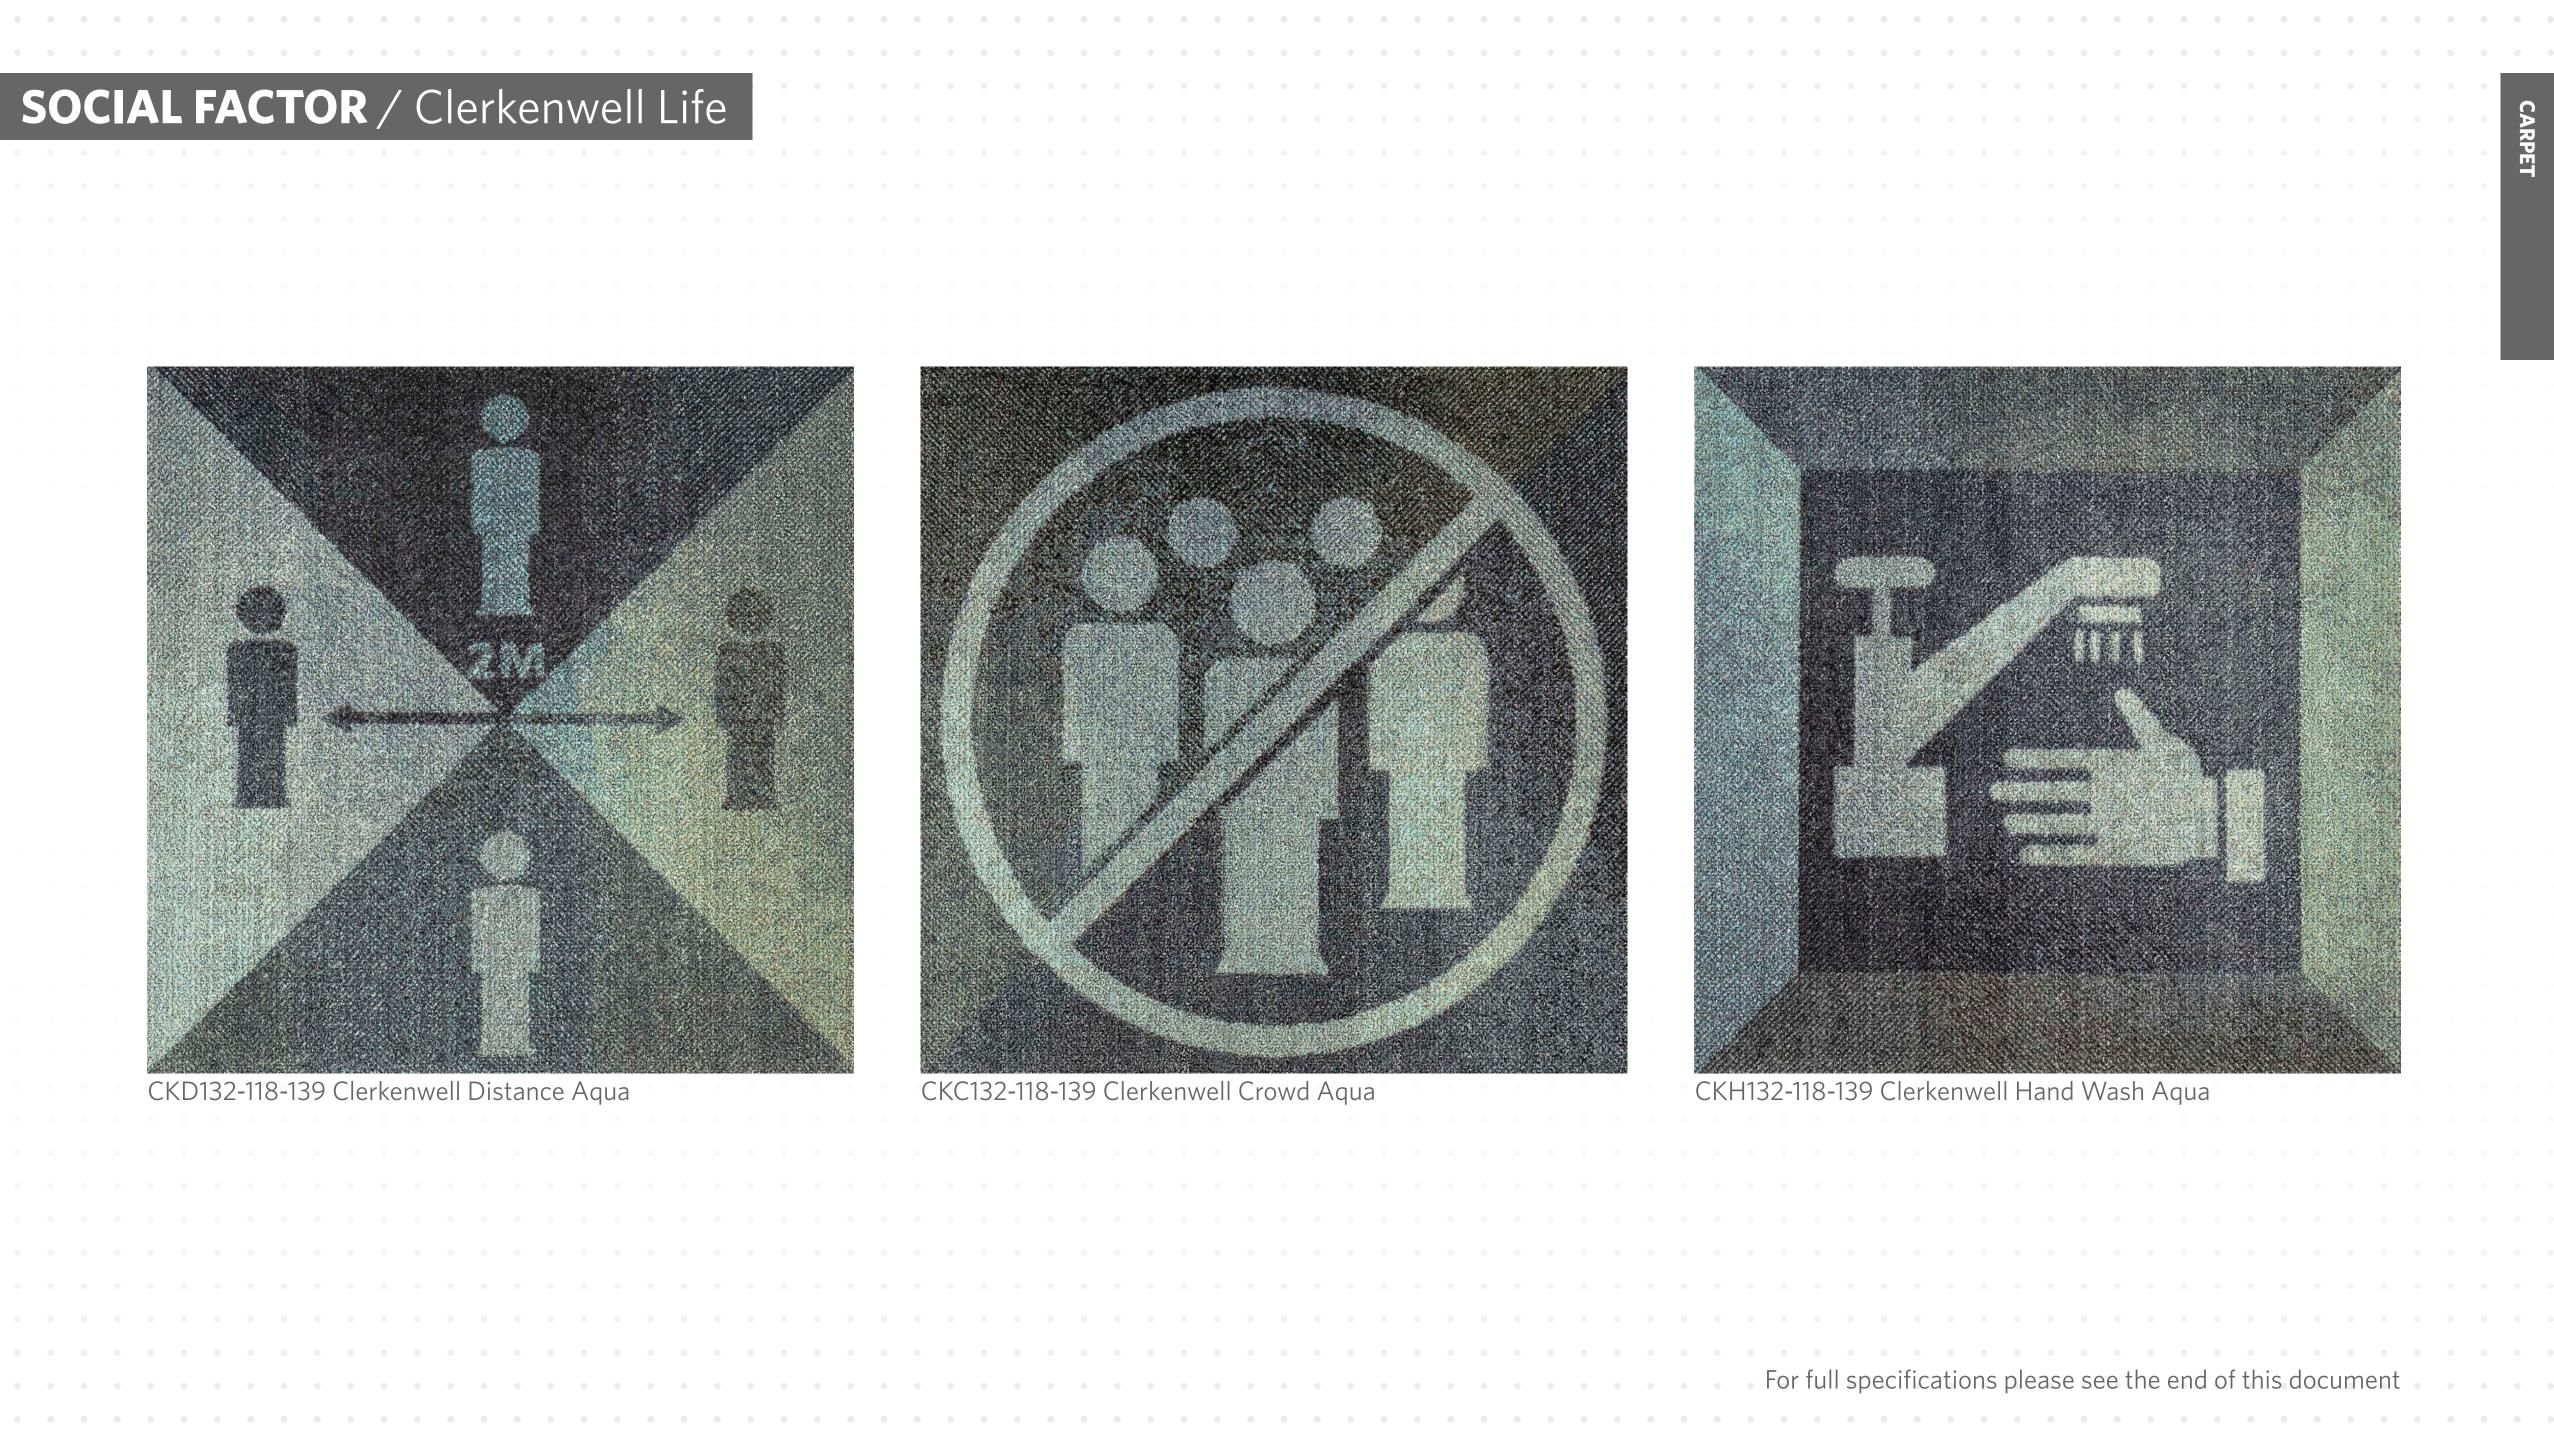

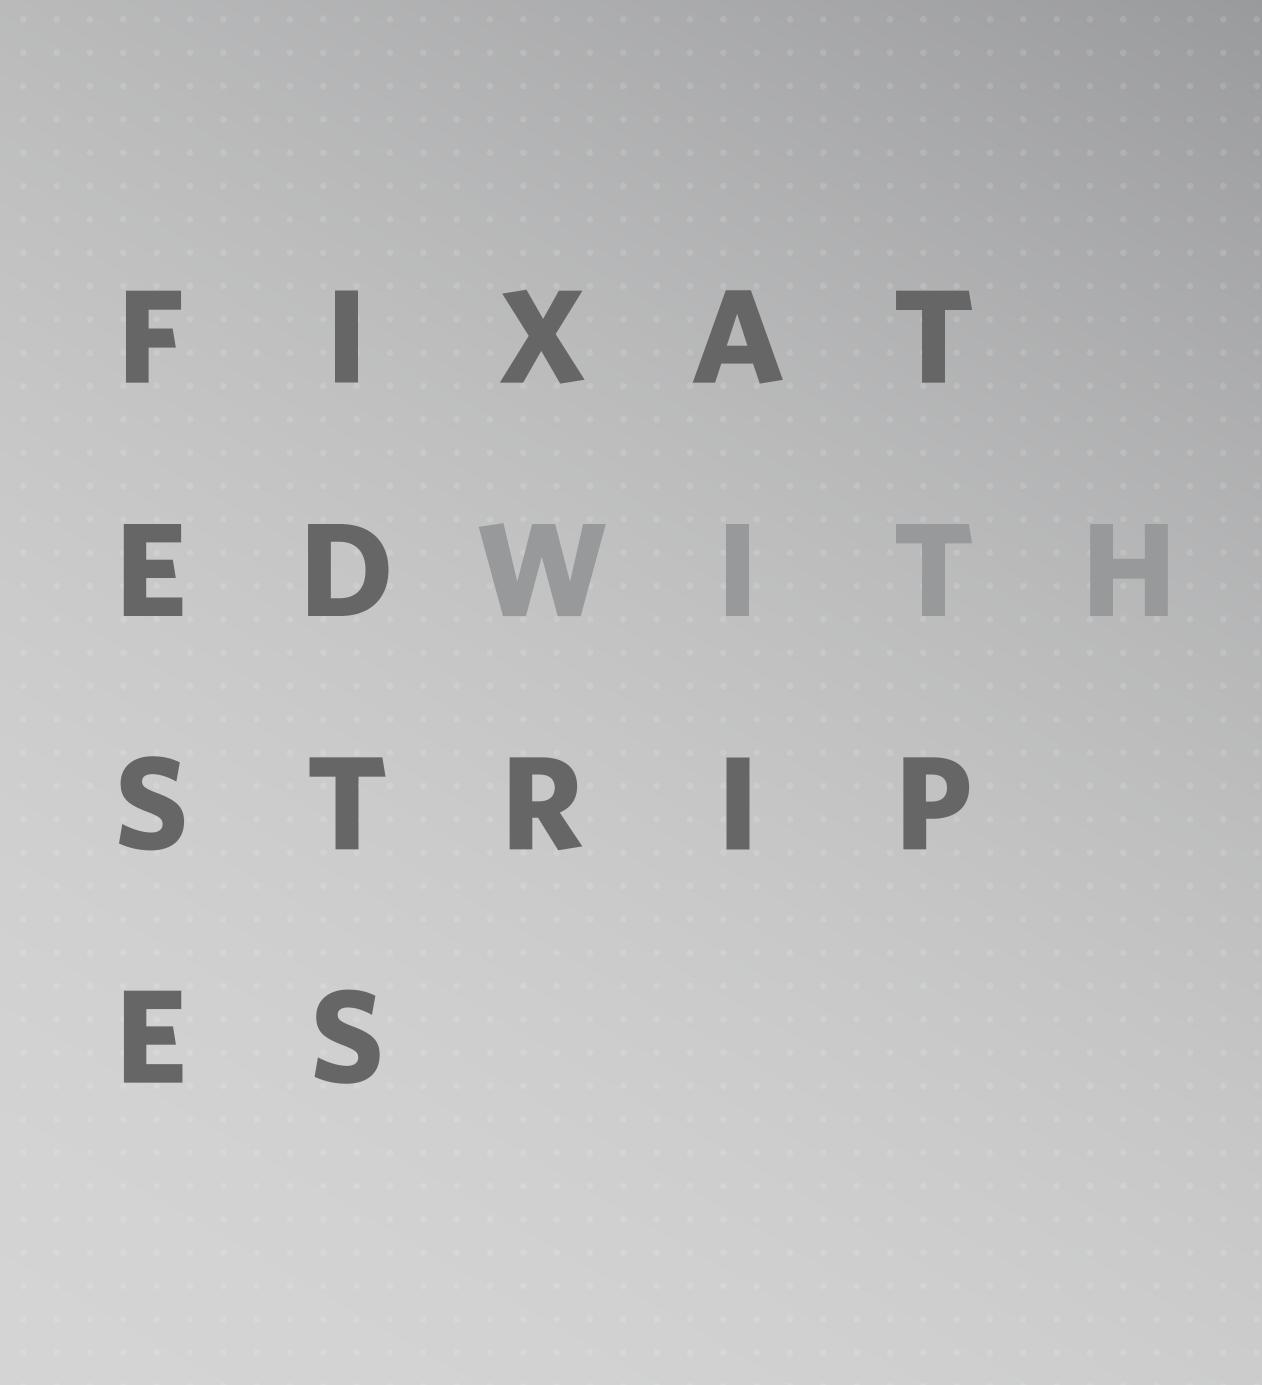

Fixated With Stripes

Dynamic and optimistic, our ever popular Fixation collection wows with stripes of every width and colour.


Social Factor, Fixated with Stripes takes the vibrancy of the stripe and combines it with informational messaging to offer a lively burst of colour and movement across the floor plane.

Milliken


.

.


SOCIAL FACTOR / Fixated With Stripes

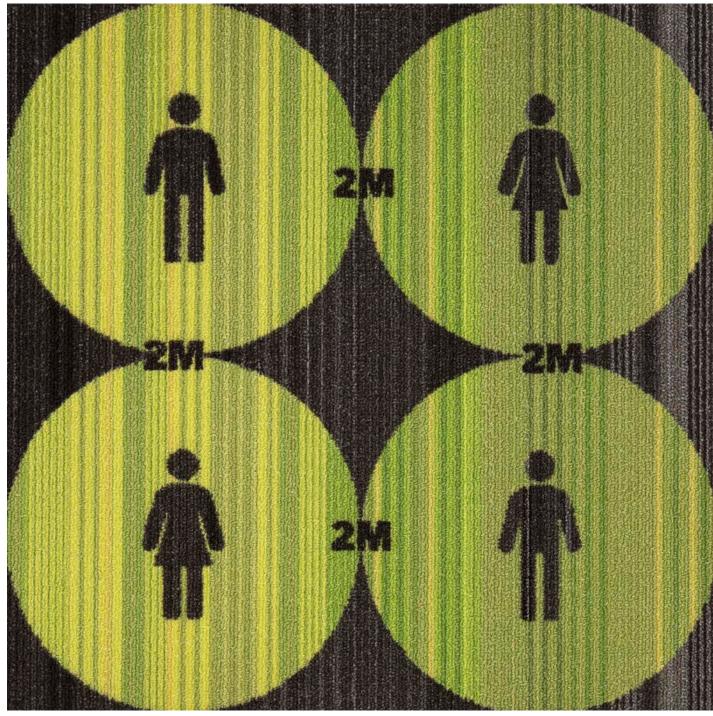

FXF103-141 Fixation Distancing 4 people Green

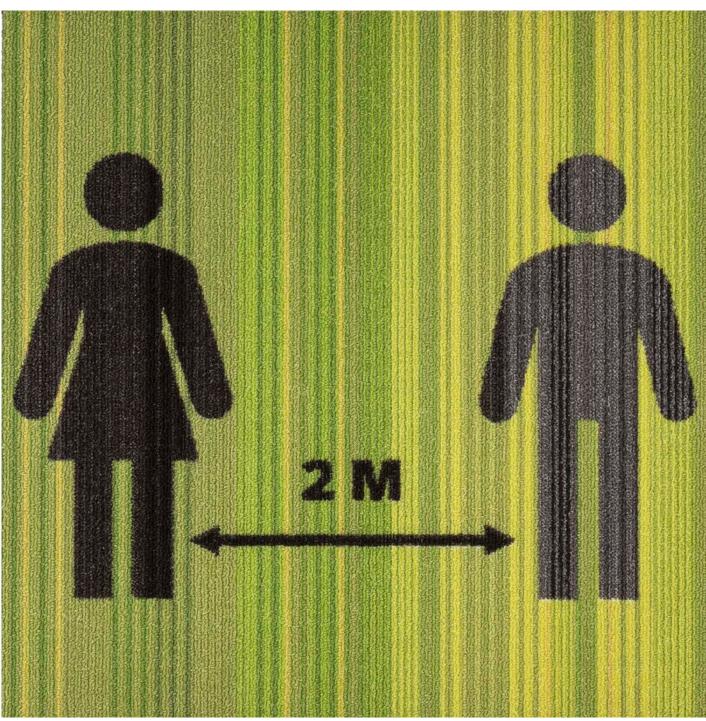


FXT103-141 Fixation Distancing 2 people Green

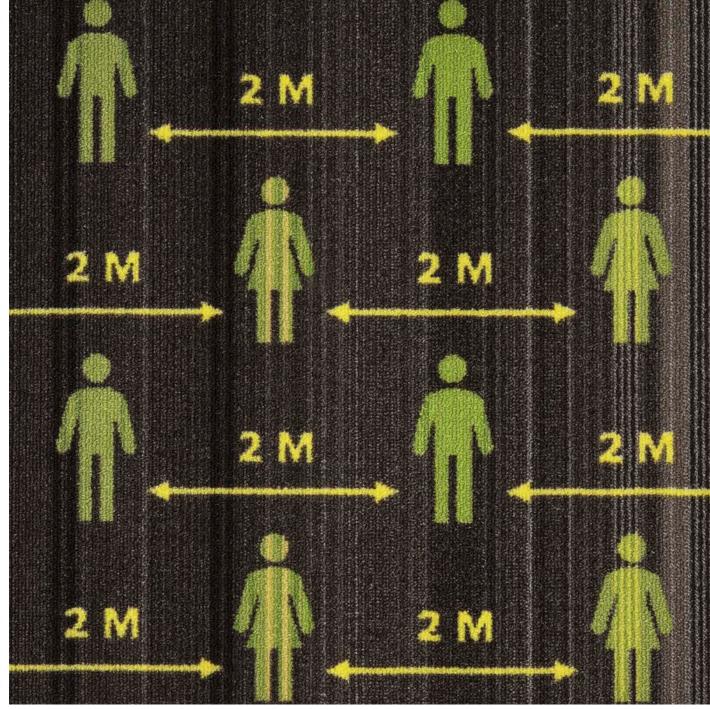


FXE103-141 Fixation Distancing 8 people Green




SOCIAL FACTOR / Fixated With Stripes

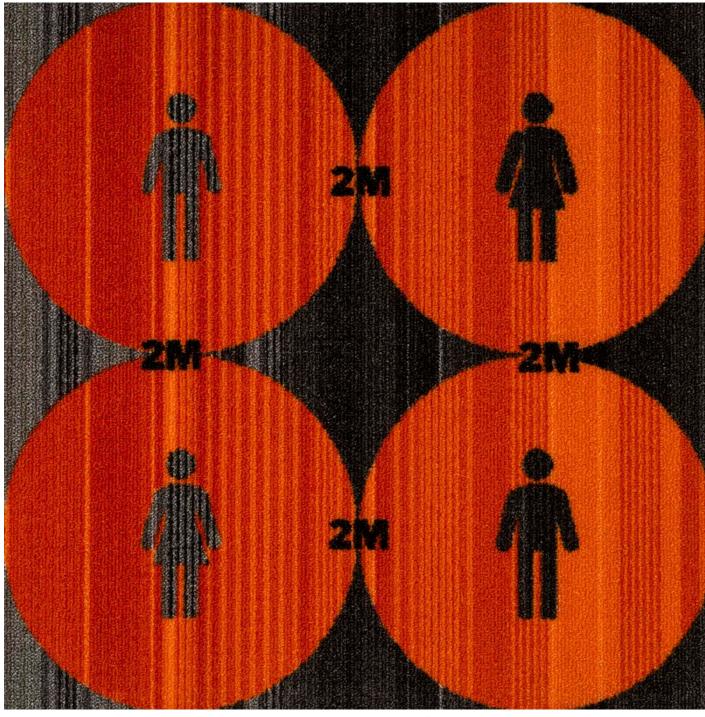

FXF128-33 Fixation Distancing 4 people Orange

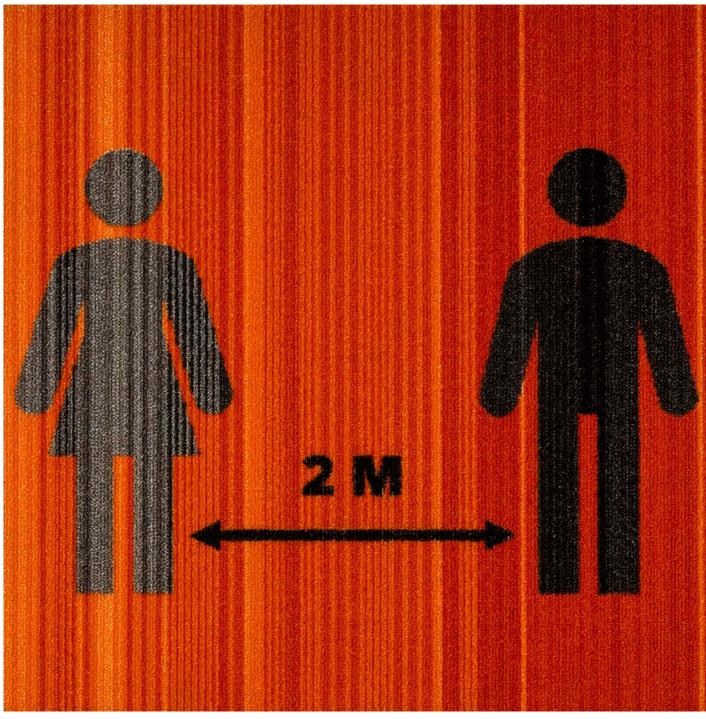

FXT128-33 Fixation Distancing 2 people Orange

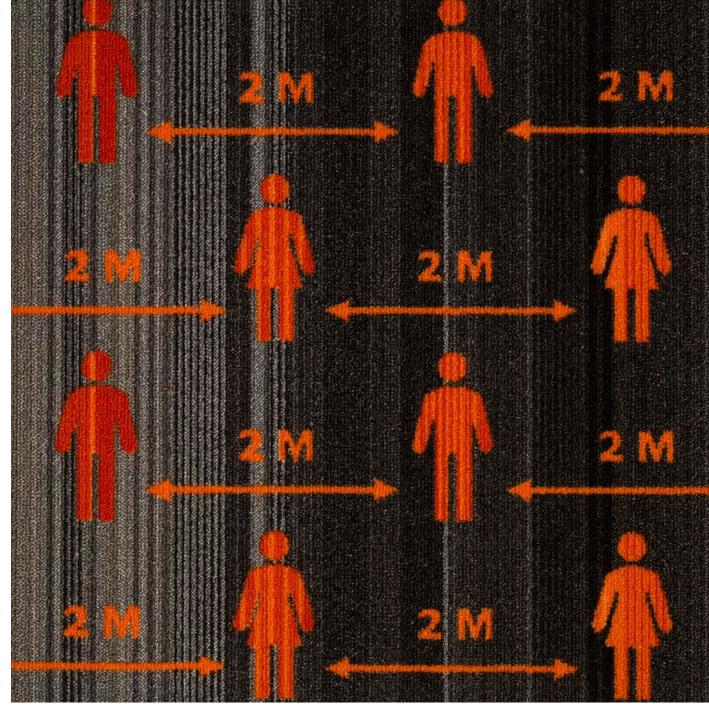

FXE128-33 Fixation Distancing 8 people Orange



SOCIAL FACTOR TO ORDER				
R D E R	· · · · ·	• • • • • • • • •		

S O C I A L F A C T O R C O L L E C T I O N

• • • •

Order Details:

The minimum order quantity for Social Factor is one box (20 to 22 tiles depending on construction type).

In the event that a full box of one particular design/colour is too much, we also offer MIXED BOX options.


These options are presented on the next pages.

Milliken

SOCIAL FACTOR / Chase the Rainbow - MIXED BOX OPTIONS




RCM-01 Rainbow Circle Mixed Box – includes Distance, Arrow & Hand Wash

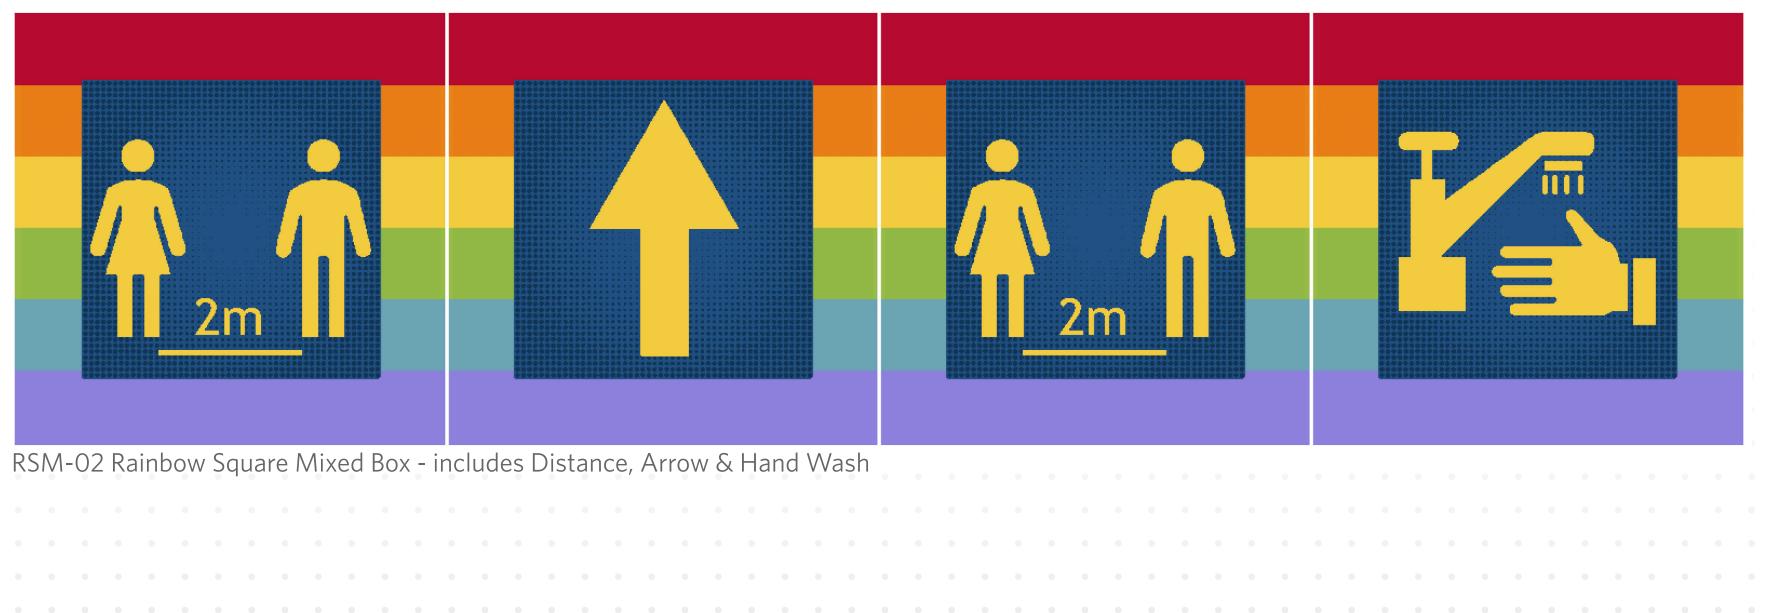


• • • • •

CARPE		
PEI		

SOCIAL FACTOR / Set In Concrete - MIXED BOX OPTIONS

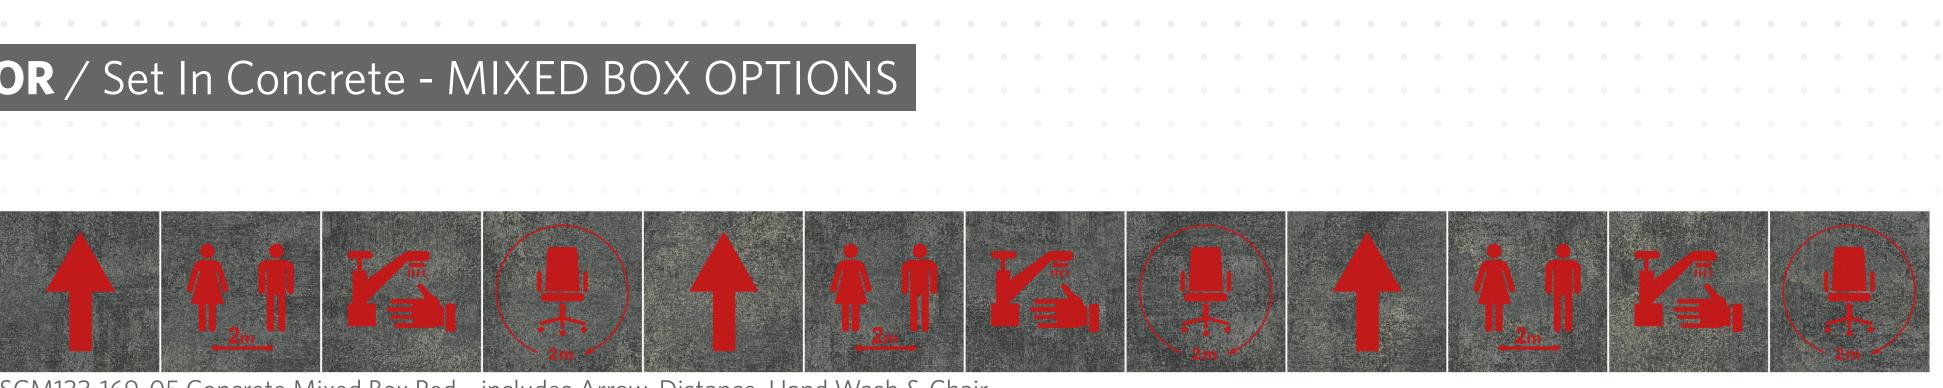


SCM133-169-05 Concrete Mixed Box Red – includes Arrow, Distance, Hand Wash & Chair

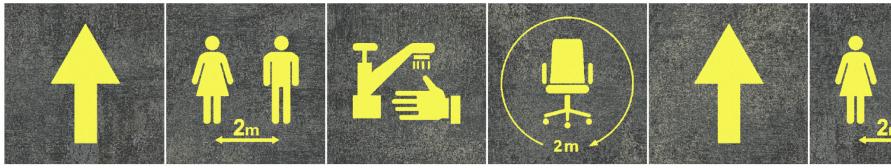

SCM133-111-05 Concrete Mixed Box Yellow – includes Arrow, Distance, Hand Wash & Chair




SCM133-141-05 Concrete Mixed Box Green – includes Arrow, Distance, Hand Wash & Chair

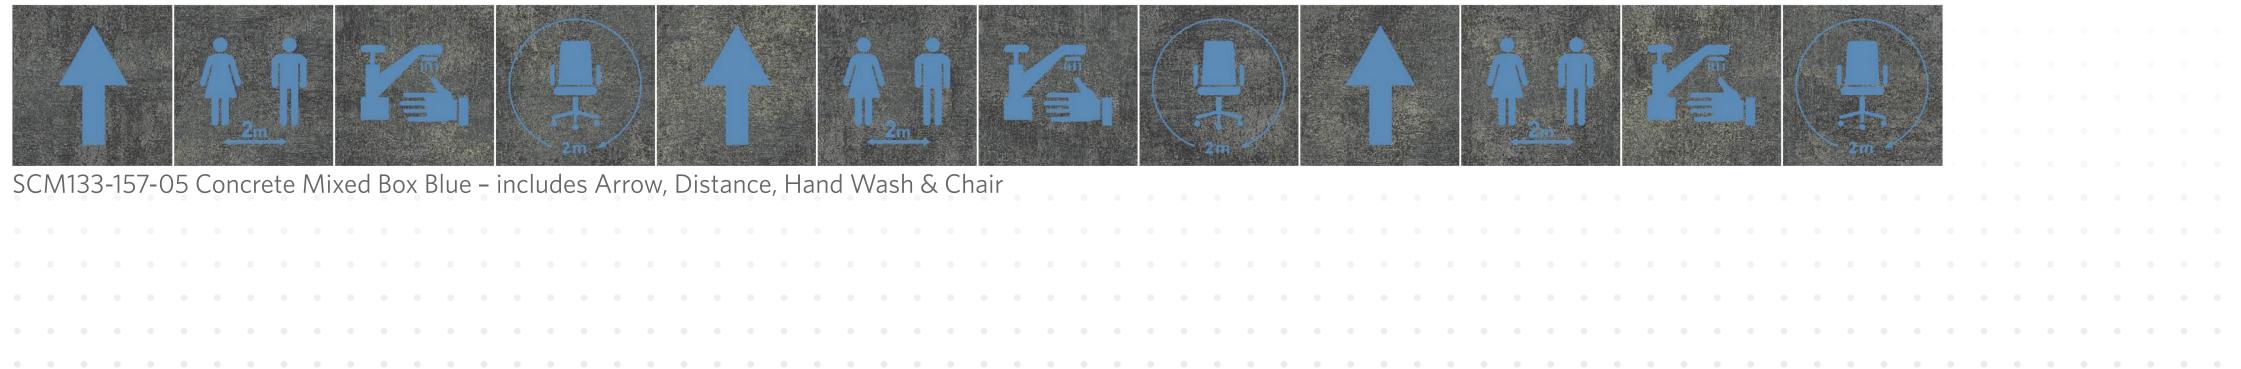

CARPE		
PEI		


SOCIAL FACTOR / Drawn Together - MIXED BOX OPTIONS

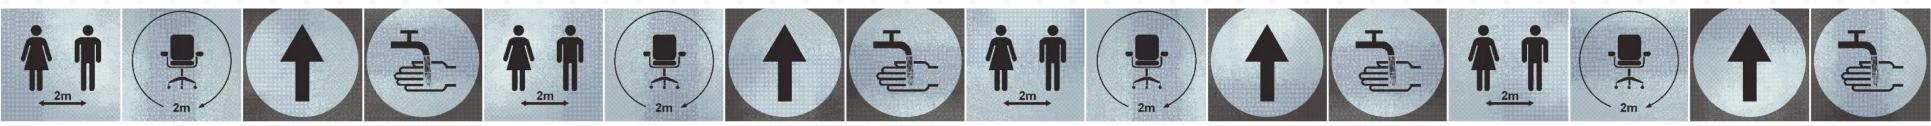


DRM58-139 Drawn Mixed Box Crystal – includes Distance, Chair, Arrow & Hand Wash



DRM123-57 Drawn Mixed Box Indigo – includes Distance, Chair, Arrow & Hand Wash

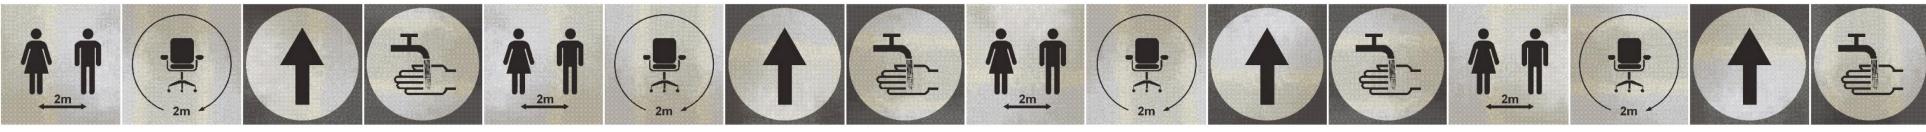

DRM144-83 Drawn Mixed Box Canvas - includes Distance, Chair, Arrow & Hand Wash

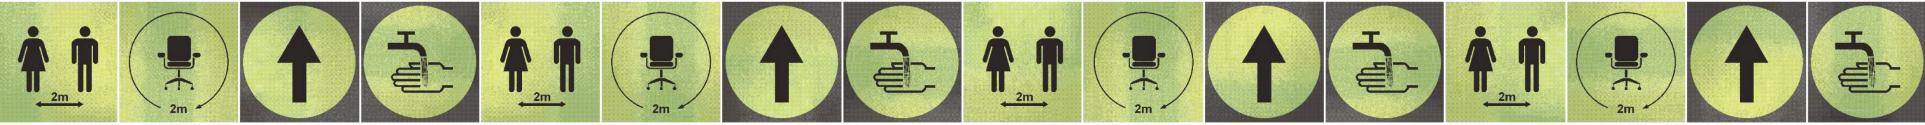

DRM103-141 Drawn Mixed Box Hill Walk – includes Distance, Chair, Arrow & Hand Wash



DRM110-104 Drawn Mixed Box Pomegranate – includes Distance, Chair, Arrow & Hand Wash



DRM102-70 Drawn Mixed Box Pumpkin – includes Distance, Chair, Arrow & Hand Wash




CARPE		
PEI		

SOCIAL FACTOR / Drawn Together - MIXED BOX OPTIONS



DNM103-141 Drawn Mixed Box 2 Hill Walk – includes Sneeze, Tissue & Hand Wash

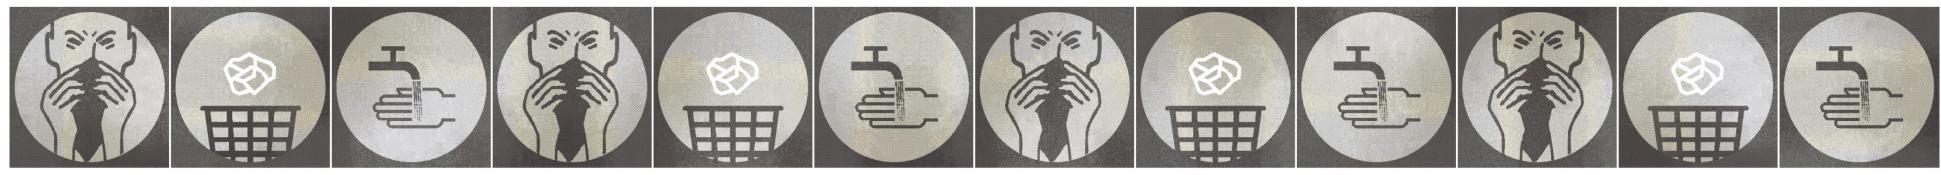

DNM144-83 Drawn Mixed Box 2 Canvas – includes Sneeze, Tissue & Hand Wash




DNM102-70 Drawn Mixed Box 2 Pumpkin – includes Sneeze, Tissue & Hand Wash

CARPE		
PEI		

SOCIAL FACTOR / Clerkenwell Life - MIXED BOX OPTIONS



CKM103-79-108 Clerkenwell Mixed Box Green – includes Distance, Crowd & Hand Wash

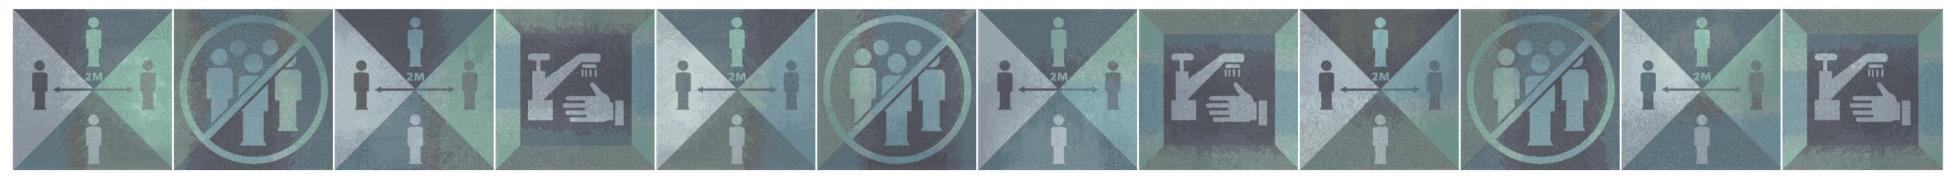


CKM132-118-139 Clerkenwell Mixed Box Aqua – includes Distance, Crowd & Hand Wash




	•		
	•	CARPE	
	•	PEI	
	•		
	•		
	•		
	•		
	•		

SOCIAL FACTOR / Fixated With Stripes - MIXED BOX OPTIONS

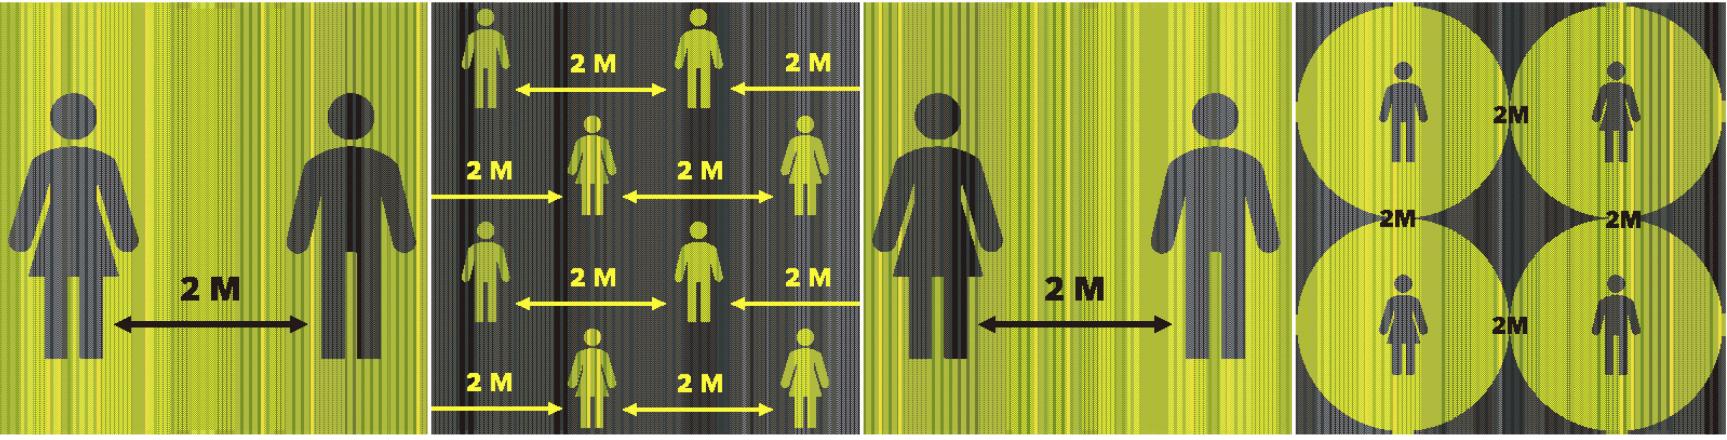

FXM103-141 Fixation Mixed Box Green – includes 2 people, 4 people & 8 people

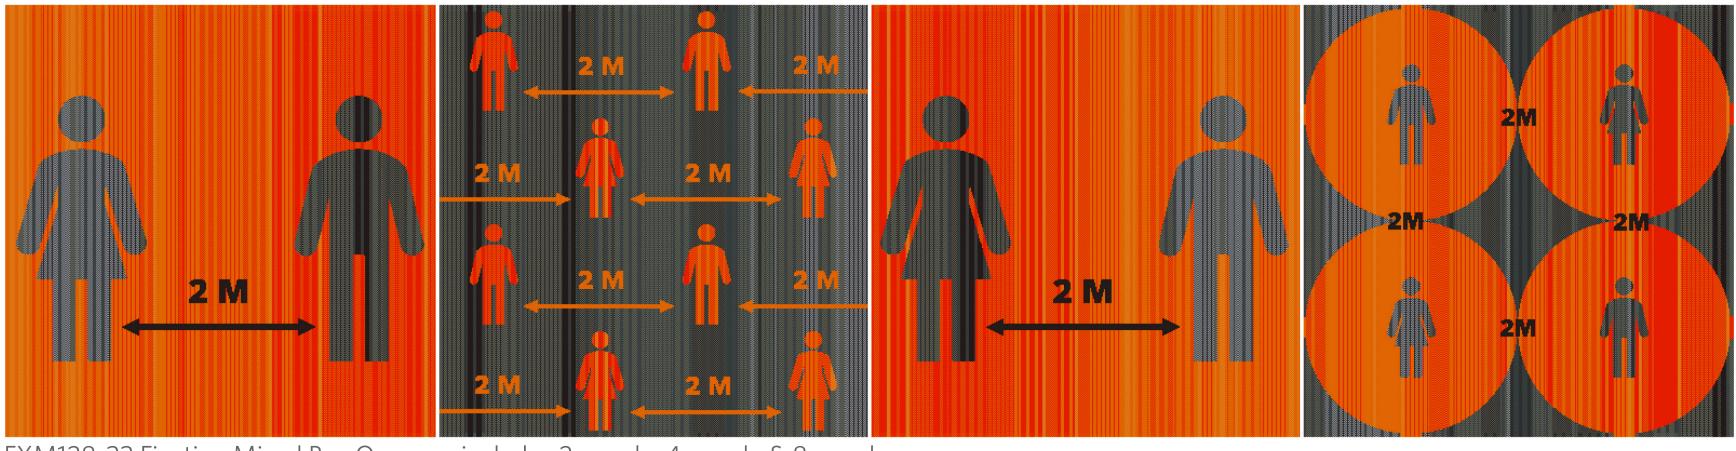

FXM128-33 Fixation Mixed Box Orange – includes 2 people, 4 people & 8 people



	•		
	•	CARPE	
	•	PEI	
	•		
	•		
	•		
	•		
	•		

R			C
		ROTT IVE	LOOOR

Protective Flooring Promoting Social Distancing

As part of Milliken's Total Floor Covering solution, we also offer a range of protective flooring solutions for entrance ways and other heavy traffic / heavy soiling areas.


The Protective Flooring designs in this collection are available as both Identity Logo Mats and D2[™] Identity Logo Mats.

- **Identity Logo Mats** are high quality textile mats with a rubber backing, offered in an array of standard sizes and also custom sizes on request.
- D2 Identity Logo Mats offer both the flexibility of conventional mats along with the lock-down stability (magnetic base) and finished appearance of installed entrance flooring. This option is lightweight, functional, easy-to-clean, and anchored to the floor via Milliken's patented Adaptex[™] Active Surface technology. Available in 3 sizes, it works as a 2-part design of the D2[™] Identity Logo Top and Base.






SOCIAL FACTOR / Chase The Rainbow

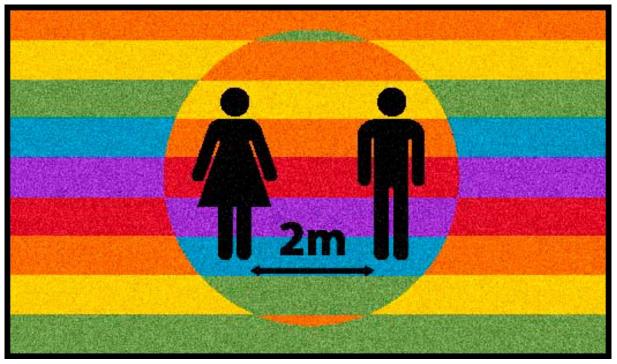

CRBOW1 115x200cm



CRBOW2 200x200cm

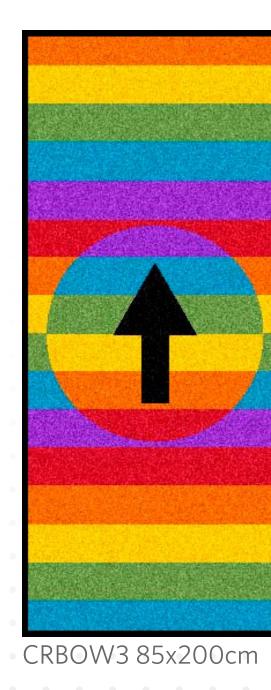

Available designs:




Standard Mat Sizes:

85x120cm, 85x150cm, 85x200cm, 115x180cm, 115x200cm, 150x200cm, 200x200cm. Other standard sizes available.

D2[™]Identity Logo Sizes:


Small – 80x100cm, Medium – 80x145cm, Large – 110x175cm

PROTECTIVE FLOORING

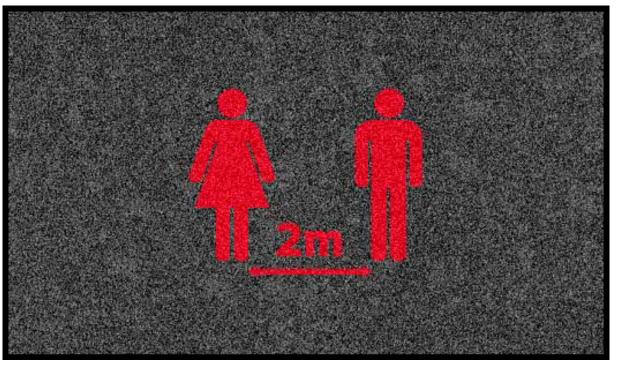

CONC1115x200cm



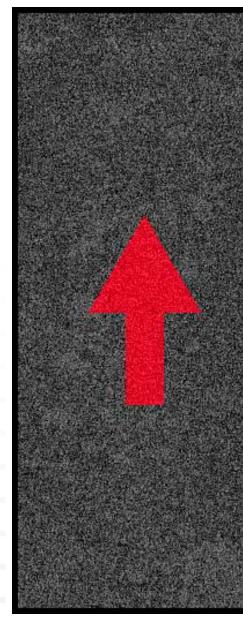

CONC3 85x200cm

Available designs: Ŵ 2m **T** 2m Ţ


Standard Mat Sizes:

85x120cm, 85x150cm, 85x200cm, 115x180cm, 115x200cm, 150x200cm, 200x200cm. Other standard sizes available.

D2[™]Identity Logo Sizes:


Small – 80x100cm, Medium – 80x145cm, Large – 110x175cm

PROTECTIVE FLOORING

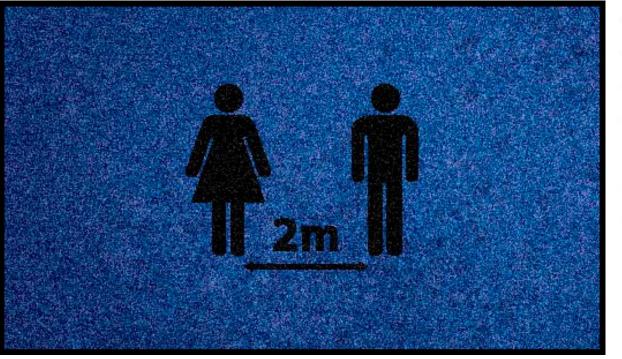


DRAWN1115x200cm



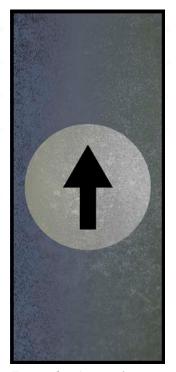

Example: Arrow design on green grey circle and blue/green background

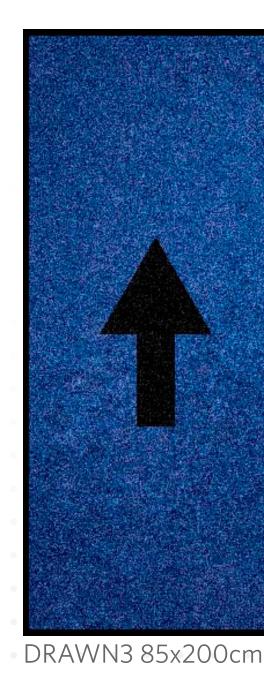

DRAWN2 200x200cm

Available backgrounds:








Blue






Blue/Green

Available designs:



Distance

Arrow




Chair









Hand Wash

Light Blue

Multiple colour combinations are available for the 4 designs with customer services for more information.

black on any of the 7 background colours shown above.

These 2 designs can be displayed in

Standard Mat Sizes:

85x120cm, 85x150cm, 85x200cm, 115x180cm, 115x200cm, 150x200cm, 200x200cm. Other standard sizes available.

D2[™] Identity Logo Sizes:

Small – 80x100cm, Medium – 80x145cm, Large – 110x175cm

shown on the left, please speak

PROTECTIVE FLOORING

SOCIAL FACTOR / Clerkenwell Life




CLERK1 200x200cm



CLERK2 200x200cm

PROTECTIVE FLOORING

SOCIAL FACTOR / Fixated With Stripes

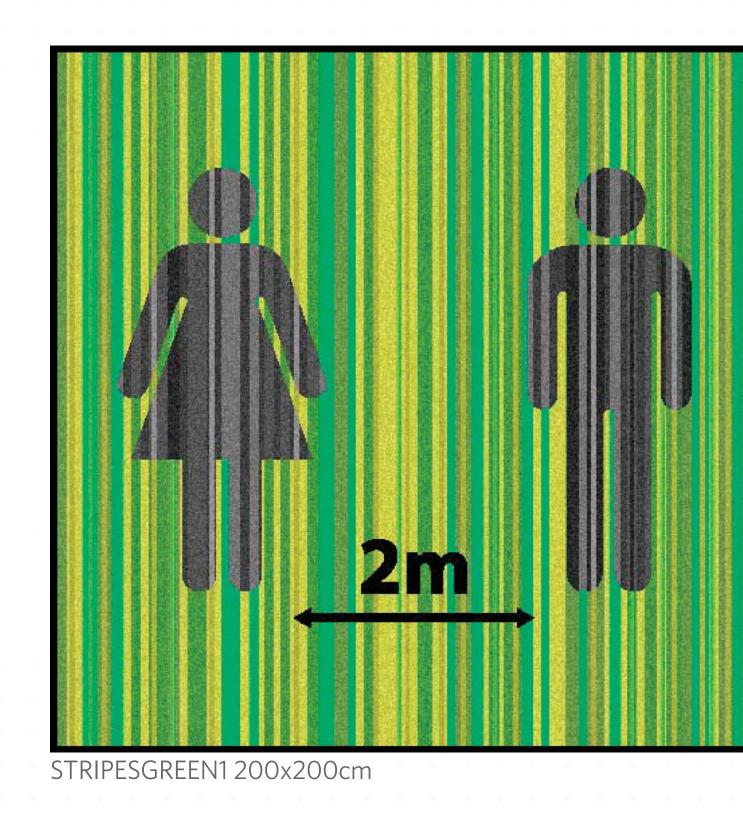





STRIPESGREEN2 200x200cm

PROTECTIVE FLOORING

SOCIAL FACTOR / Fixated With Stripes

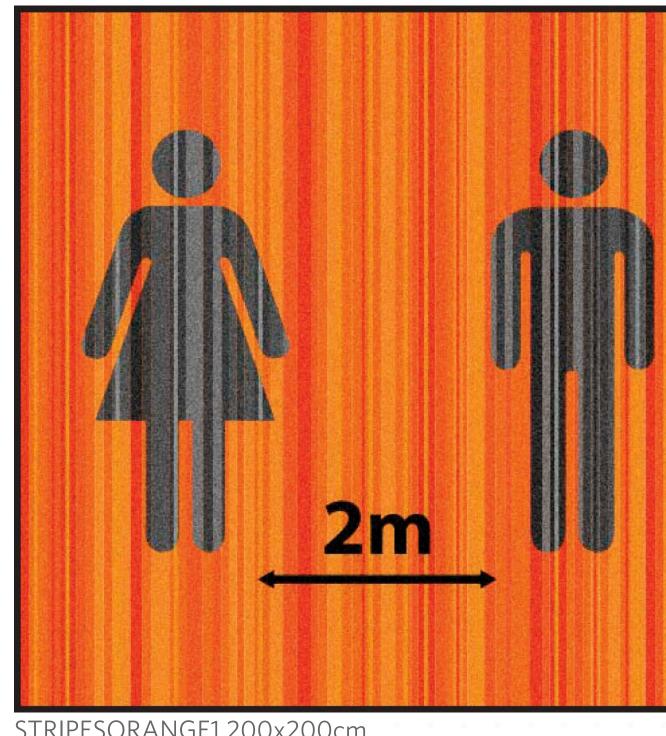

STRIPESORANGE1 200x200cm

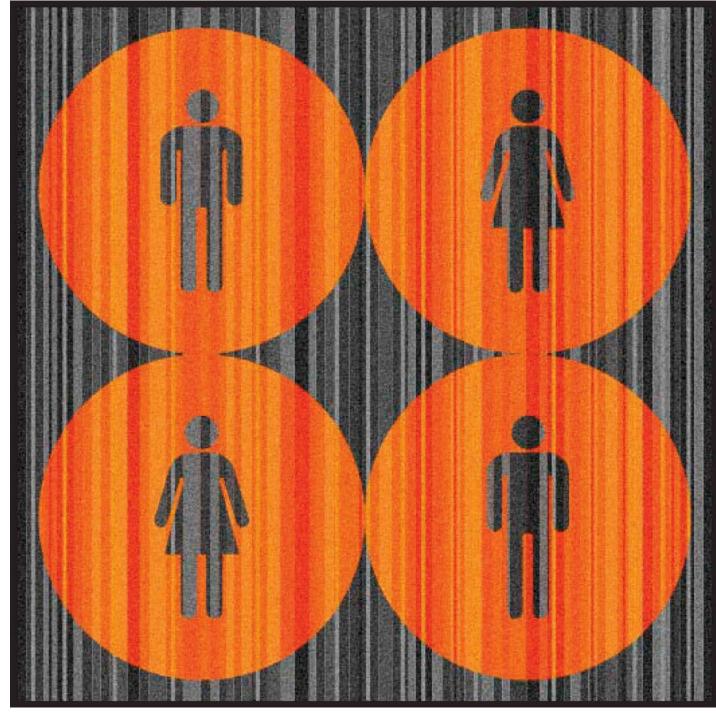

STRIPESORANGE2 200x200cm

PROTECTIVE FLOORING

F R O M T H E FLOOR UP


In addition to offering an important medium for graphic messaging, the floor covering can provide an effective way to design other important new safety elements into the office layout. As physical distancing requires a different approach to workplace design, the floor covering can provide an effective way to incorporate many important safety practices into the office layout.

In addition to offering a valuable opportunity for graphic messaging, colour and pattern in the carpet can:

- DEFINE BOUNDARIES
- CREATE ZONES
- PROVIDE WAYFINDING
- SET NAVIGATION
- DIRECT TRAFFIC
- PROVIDE A MEASURING TOOL

Design and Visualisation Support

Milliken's team of in-house design, visualisation and well-being experts can help clients work through these new challenges and develop creative solutions.

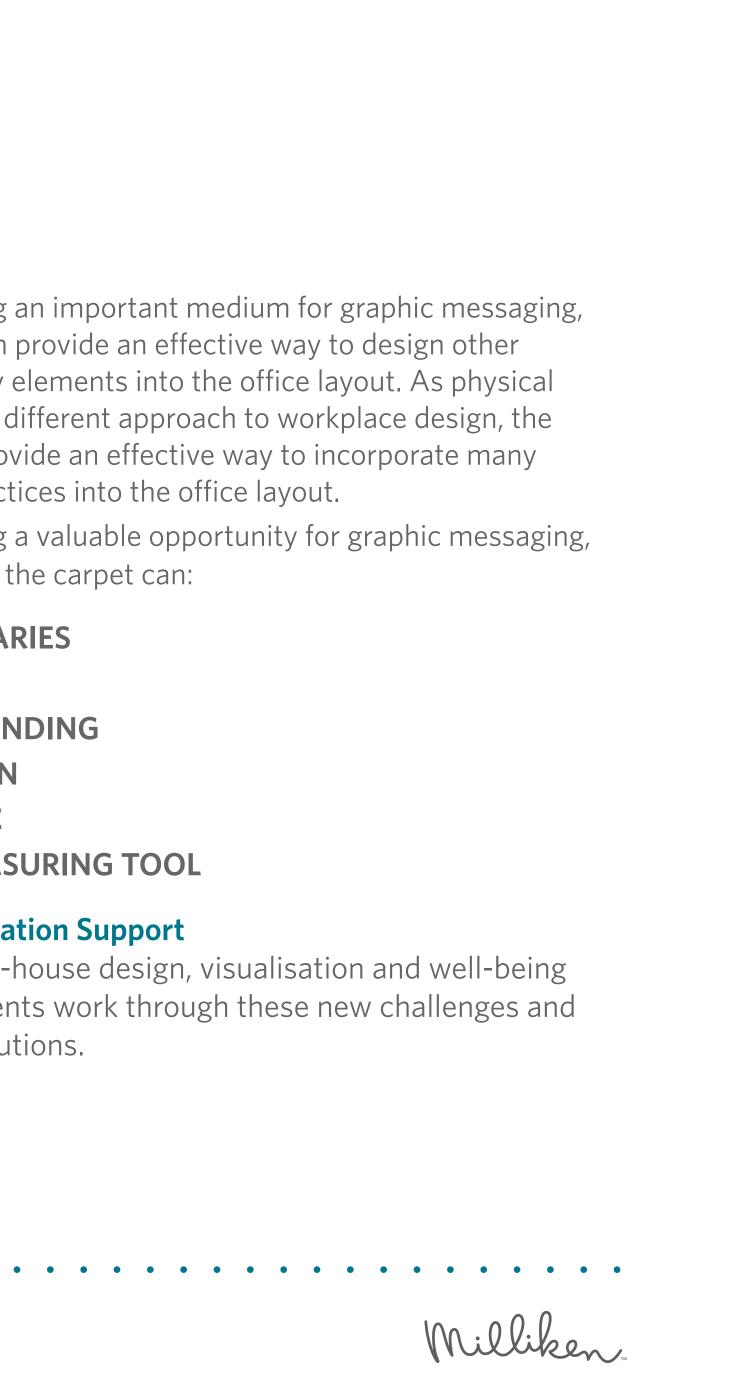

SOCIAL FACTOR / Chase The Rainbow


SPECIFICATION

 $3\,700\,\mathrm{g/m^2}$ **Tiles per Box** $22(5.5m^2)$

Construction Tufted, Level Loop Pile Face Fibre Nylon 6 **Soil Release** StainSmart[®] **Finished Face Weight** 420 g/m^2 Gauge 39.4/10 cm Rows 56/10 cm **Tuft Density** 220 640/m² **Finished Pile Height** 3.0 mm **Standard Backing** Comfort Lite 90% recycled open cell polyurethane cushion backing Available with TractionBack[®] on request Nominal Total Thickness 8.9 mm **Tile Size** 500 x 500 mm **Nominal Total Weight**

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Bfl - s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 30 dB Sound absorption (ISO 354) 0.3 Class D Alpha s values 125Hz 0.02, 250Hz 0.04, 500Hz 0.51, 1000Hz 0.23, 2000Hz 0.30, 4000Hz 0.38

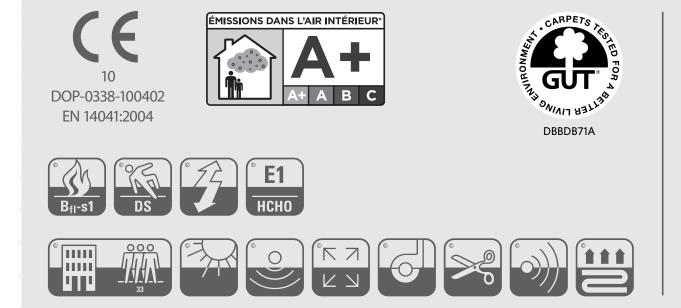

ENVIRONMENTAL

61% recycled content by total product weight Manufactured in ISO14001 certified location using renewable sources GuT & CRI Green Label Plus certified for indoor air quality EPD verified BRE certified

GUARANTEES

12 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.

SOCIAL FACTOR / Set In Concrete - with Comfort Plus[®] Cushion Backing

SPECIFICATION


Nominal Total Weight

 $4\,200\,{\rm g/m^2}$ Tiles per Box 20 (5m²)

Construction Tufted, Level Loop Pile Face Fibre Nylon 6 Soil Release StainSmart[®] **Finished Face Weight** $600 \,\text{g/m}^2$ Gauge 39.4/10 cm Rows 39.4/10 cm **Tuft Density** 155 000/m² **Finished Pile Height** 3.3 mm **Standard Backing** Comfort Plus[®] 90% recycled open cell polyurethane cushion backing Available with TractionBack[®] on request Nominal Total Thickness 9.9 mm **Tile Size** 500 x 500 mm

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Cfl - s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 33 dB Sound absorption (ISO 354) 0.15 Class E Alpha s values 125Hz 0.01, 250Hz 0.07, 500Hz 0.37, 1000Hz 0.23, 2000Hz 0.30, 4000Hz 0.38

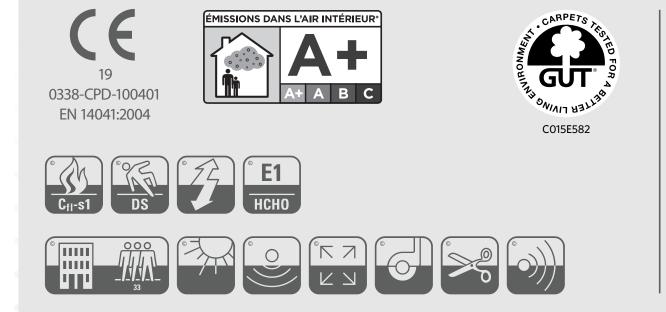

ENVIRONMENTAL

59% recycled content by total product weight Manufactured in ISO14001 certified location using renewable sources GuT & CRI Green Label Plus certified for indoor air quality EPD verified **BRE** certified

GUARANTEES

15 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request

SOCIAL FACTOR / Set In Concrete - with Comfort Lite Cushion Backing


SPECIFICATION

 $3\,700\,\mathrm{g/m^2}$ **Tiles per Box** $22(5.5m^2)$

Construction Tufted, Level Loop Pile Face Fibre Nylon 6 Soil Release StainSmart[®] **Finished Face Weight** $450 \,\text{g/m}^2$ Gauge 40/10 cm Rows 38/10 cm **Tuft Density** 155 000/m² **Finished Pile Height** 2.7 mm **Standard Backing** Comfort Lite 90% Recycled content Polyurethane cushion backing Available with TractionBack[®] on request Nominal Total Thickness 8.5 mm **Tile Size** 500 x 500 mm **Nominal Total Weight**

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Cfl - s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 30 dB Sound absorption (ISO 354) 0.25 Class E Alpha s values 125Hz 0.07, 250Hz 0.06, 500Hz 0.56, 1000Hz 0.19, 2000Hz 0.26, 4000Hz 0.32

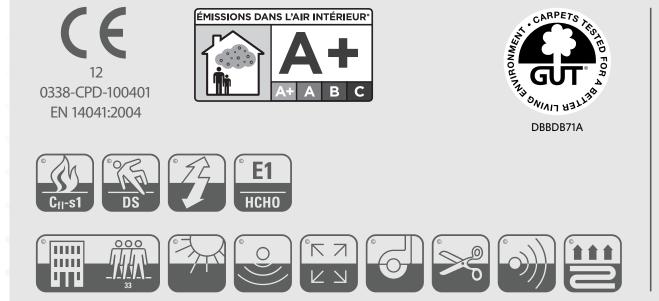

ENVIRONMENTAL

59% recycled content by total product weight Manufactured in ISO14001 certified location using renewable sources

GuT & CRI Green Label Plus certified for indoor air quality **BRE** certified

GUARANTEES

12 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request

SOCIAL FACTOR / Drawn Together

SPECIFICATION


Construction

Tufted, Textured Loop Pile Face Fibre ECONYL® 100% recycled Nylon 6 Soil Release StainSmart[®] **Finished Face Weight** $490 \, \text{g/m}^2$ Gauge 47.2/10 cm Rows 44/10 cm **Tuft Density** 207 680/m² **Finished Pile Height** 2.5 mm **Standard Backing** Comfort Lite 90% recycled open cell polyurethane cushion backing Available with TractionBack[®] on request Nominal Total Thickness 8.3 mm **Tile Size**

500 x 500 mm **Nominal Total Weight** $3\,800\,{\rm g/m^2}$ Tiles per Box 22 (5.5m²)

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Bfl – s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 31 dB Sound absorption (ISO 354) 0.25 Class E Alpha s values 125Hz 0.01, 250Hz 0.07, 500Hz 0.59, 1000Hz 0.18, 2000Hz 0.26, 4000Hz 0.36

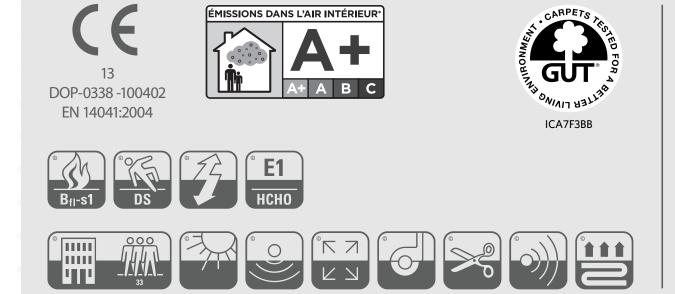

ENVIRONMENTAL

74% recycled content by total product weight including up to 7% post consumer content Manufactured in ISO14001 certified location using renewable sources GUT & CRI Green Label Plus certified for indoor air quality EPD verified **BRE** certified

GUARANTEES

12 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.



SOCIAL FACTOR / Clerkenwell Life

SPECIFICATION

Construction

500 x 500 mm


 $3\,800\,{\rm g/m^2}$ Tiles per Box 22 (5.5m²)

Nominal Total Weight

Tufted, Textured Loop Pile Face Fibre ECONYL® 100% recycled Nylon 6 Soil Release StainSmart[®] **Finished Face Weight** $490 \, \text{g/m}^2$ Gauge 47.2/10 cm Rows 44/10 cm **Tuft Density** 207 680/m² **Finished Pile Height** 2.5 mm **Standard Backing** Comfort Lite 90% recycled open cell polyurethane cushion backing Available with TractionBack® on request Nominal Total Thickness 8.3 mm **Tile Size**

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Bfl – s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 31 dB Sound absorption (ISO 354) 0.25 Class E Alpha s values 125Hz 0.01, 250Hz 0.07, 500Hz 0.59, 1000Hz 0.18, 2000Hz 0.26, 4000Hz 0.36

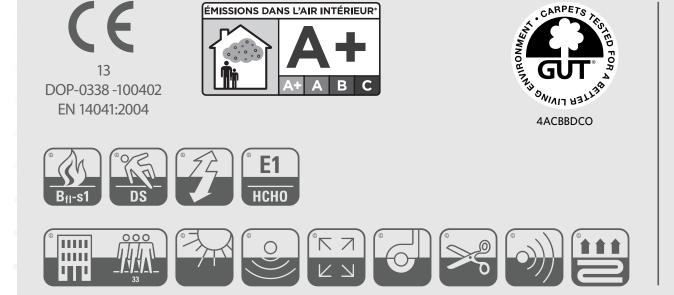

ENVIRONMENTAL

74% recycled content by total product weight including up to 7% post consumer content Manufactured in ISO14001 certified location using renewable sources GUT & CRI Green Label Plus certified for indoor air quality EPD verified **BRE** certified

GUARANTEES

12 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.



SOCIAL FACTOR / Fixated With Stripes


SPECIFICATION

 $3\,700\,\mathrm{g/m^2}$ **Tiles per Box** $22(5.5m^2)$

Construction Tufted, Level Loop Pile Face Fibre Nylon 6 **Soil Release** StainSmart[®] **Finished Face Weight** 420 g/m^2 Gauge 39.4/10 cm Rows 56/10 cm **Tuft Density** 220 640/m² **Finished Pile Height** 3.0 mm **Standard Backing** Comfort Lite 90% recycled open cell polyurethane cushion backing Available with TractionBack® on request Nominal Total Thickness 8.9 mm **Tile Size** 500 x 500 mm **Nominal Total Weight**

PERFORMANCE

Flammability (Euroclassification EN13501:1-2002) Class Bfl – s1 Flammability (Radiant Panel ASTM-E-648) Class 1 Flammability (Hot metal nut BS4790) Low radius of Char Use Classification (EN1307) Class 33 Heavy Commercial Use Castor Chair (BS EN 985:2001) Class A – Intensive use (r value \geq 2.4) Static Electricity (ISO 6356) \leq 2.0 KV, Permanent Conductive Fibre Impact Sound (ISO 10140-3) 30 dB Sound absorption (ISO 354) 0.3 Class D Alpha s values 125Hz 0.02, 250Hz 0.04, 500Hz 0.51, 1000Hz 0.23, 2000Hz 0.30, 4000Hz 0.38

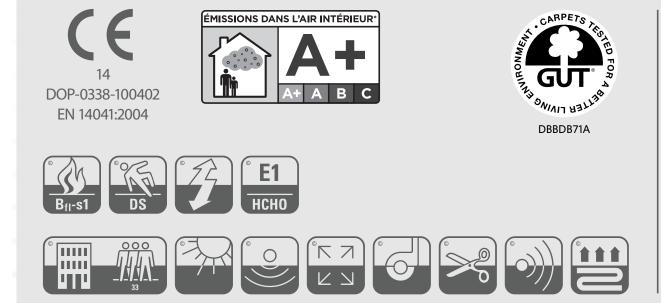

ENVIRONMENTAL

61% recycled content by total product weight Manufactured in ISO14001 certified location using renewable sources GuT & CRI Green Label Plus certified for indoor air quality EPD verified BRE certified

GUARANTEES

12 year wear guarantee Lifetime Antistatic guarantee Latent Defects guarantee

Design Copyright - Milliken & Company.

This cushion-back carpet tile product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.

SOCIAL FACTOR / D2 Identity Logo

TOP SPECIFICATION

Construction

Tufted, Cut Pile Yarn Type Polyamide (Nylon), Multi-Filament

Size

Small: 80 cm x 100 cm +/- 5mm Medium: 80 cm x 145 cm +/- 5mm Large: 110 cm x 175 cm +/- 5mm

Weight

S: 2.11 kg/piece M: 3.02 kg/piece L: 4.93 kg/piece

Total Fabric Weight $940 \, \text{g/m}^2$ **Stitches Per Inch** 10.5

Dye Method Chromojet

Backing Nitrile rubber with Adaptex[™] Active Surface Technology

BASE SPECIFICATION

Construction

Vinyl Backing with Adaptex[™] Technology and Acrylic Adhesive

Adhesive Type Pressure sensitive acrylic

Size Small: 61 cm x 89 cm +/- 5mm Medium: 61 cm x 127 cm +/- 5mm

Weight S: 1.54kg/piece M: 2.2 kg/piece

Minimum Application (Installation) Temp 10°C

Temperature Range -26°C to 71°C

Handling Never fold Bases

Storage Base should be stored flat





D2 TOP & BASE

Nominal Thickness 5.59 mm **Recommended Installation Method(s)**

Reference Installation Guide

Cleaning Method Top is Launderable Origin

Base (US)

Top (EU)

Flammability (EN ISO 13501)

Bfl-s1

Electrical Resistance (BS ISO 10965:2011) Average figure for Vertical & Horizontal is 5.5 x 10¹¹ **Assessment of Static Electrical Propensity** (BS ISO 6356:2012) -0.6kV (<_ 2.0kV re: BS EN 1307:2014) Slip Resistance (EN 13893 2002) Mean Figure for Warp & Weft is 0.6

ENVIRONMENTAL

Quality Management System (ISO 9001:2015) Certificate number Q 06001 Environmental Management System (ISO 14001:2015) Certificate number EMS 505581

GUARANTEES

1 - year guarantee against manufacturing defects

1 - year Base wear warranty

4 - year Top wear warranty

Design Copyright - Milliken & Company.

This product is covered by one or more patents, published applications and/or patents pending. Specifications are subject to normal manufacturing tolerances and may be changed without prior notice. Copies of actual test results are available upon request.

SOCIAL FACTOR / Identity Logo Mats

PRODUCT DESCRIPTION

Tufted cut pile manufactured with twisted and heat set BCF polyamide 6,6 fibres on nitrile rubber backing **Fire resistance** Cfl-s1 **Total thickness** 8mm **Total Weight** 2800g/m² (+/- 5%) Yarn Composition 100% polyamide 6,6 BCF, twisted and heat set multifilaments **Primary Backing Composition and Construction** Polyester nonwoven

PILE

Construction Cut pile Tuft method Straight tufted **Pile height** 8.0mm Stitch rate 8.5spi Total fabric weight 975g/m²

TEXTILE COLOUR FASTNESS

Dyeing Method High definition digital dye injection technology Light (ISO 105-B01) 8 (maximum mark) Rubbing (ISO 105-X12) 4-5 Water (ISO 105-E01) Seawater (ISO 105-E02) 4-5 Shampoo (BS 18168) 4-5 Organic Solvents (ISO 105-D02) 4-5

SECONDARY BACKING

Composition 100% Nitrile Rubber Mass $1650g/m^2$ (body of mat) **Backing thickness** 1.3mm **Border thickness** 2.6mm Border width 20mm **Phthalates** NO Ortho-phthalates in this rubber



PERFORMANCE

Antistatic Behaviour (ISO 10965) Approx 10¹³ ohms Personal Charging (ISO 6356) <2kV (antistatic) Flammability (EN ISO 13501) Cfl-s1 Slip Resistance (EN 13893) 0.57 DS

ENVIRONMENTAL

ADA / BS 8300 / ISO 21542 Compliant - Yes LEED[®] Point Contributor - Yes ISO Manufacturing Certification ISO 9001 ISO Environmental Certification ISO 14001 Origin EU

GUARANTEES

Please refer to our written warranty

Design Copyright - Milliken & Company.

Please Note: As each customer's use of our product may be different, information we provide, including without limitation, recommendations, test results, samples, care/labelling/processing instructions or marketing advice, is provided in good faith but without warranty and without accepting any responsibility/liability. Each customer must test and be responsible for its own specific use, further processing, labelling, marketing, etc. All sales are exclusively subject to our standard terms of sales posted at www.milliken.com/terms (all additional/ different terms are rejected) unless explicitly agreed otherwise in a signed writing.

	Milliken.	Milliken.	Milliken.	Milliken.	
	Europe	France	Deutschland	India	
0	Instagram @ MillikenEurope	Instagram @MillikenFrance	Instagram @MillikenDeutschland	Instagram @MillikenIndia	
f	Facebook Milliken Floors Europe	Facebook Milliken Floors France	Facebook Milliken Floors Deutschland	Facebook Milliken Floors India	
Y	Twitter @ MillikenEurope		#MillikenStayC	onnected	
in	Linkedin Milliken Floors Europe		Follow Us!		

CUSTOMER SERVICE SERVICE CLIENT / KUNDENSERVICE-CENTER / SERVICIO AL CLIENTE

UK T. +44 (0)1942 612 777 E. carpetenquiries@milliken.com

FRANCE T. 08 05 54 27 77 E. demandesmoquettes@milliken.com DEUTSCHLAND T. 0800 7243794 E. verkauf@milliken.com

ESPAÑA T. +44 (0)1942 612 777 E. informaciondemoqueta@milliken.com PROTECTIVE FLOORING CUSTOMER SERVICE T. +44 (0)1942 612 999 E. protectiveflooringeurope@milliken.com

www.millikenfloors.com



